

Color Schemes

In the tree of the Server Management snap-in, select the "Color Schemes" node (which is a part of the "Configuration" node) to display the corresponding pane.

This chapter covers the following topics:

- Elements of the Color Schemes Pane
- Adding a Color Scheme
- Modifying a Color Scheme
- Renaming a Color Scheme
- Deleting a Color Scheme

See *Color Schemes* in Entire Screen Builder's *System Management Hub* documentation for further information on color schemes.

Elements of the Color Schemes Pane

The Color Schemes pane is only shown when the Entire Screen Builder Server has been started and when color schemes have been defined. When the Entire Screen Builder Server has been stopped or if color schemes have not yet been defined, the corresponding message is shown.

When color schemes have been defined, the Color Schemes pane is shown in the console window.

Name	Type	ID	Modifiable
 sagcolors	Mainframe	1	No
 SagBlue	Mainframe	2	No
 bs2cols	Mainframe	3	No
 ibm3279	Mainframe	4	No
 monochrome1	Mainframe	5	No
 monochrome2	Mainframe	6	No
 VTCOLORS	VT	7	No
 MyColors	Mainframe	8	Yes

The following topics describe the elements of the Color Schemes pane:

- Toolbar
- Color Schemes

Toolbar

The following toolbar buttons are available:



Delete color scheme



Refresh list of color schemes

Note:

Some toolbar buttons are only shown when a color scheme has been selected in the Color Schemes pane.

Color Schemes

When color schemes have been defined, the Color Schemes pane contains several columns providing the following information:

- An icon indicating whether the color scheme can be modified:



The color scheme cannot be modified.



The color scheme can be modified.

- The name of the color scheme.
- The type of color scheme:
 - Mainframe (applies to sessions of type Telnet TN3270 and BS2000).
 - VT (applies to sessions of type Telnet VT and Natural UNIX).
- The ID that was automatically created when this color scheme has been added.
- Whether the color scheme can be modified ("Yes" or "No").

If you want to modify color schemes, you have to switch on administration mode.

Note:

It is possible to remove columns from the Color Schemes pane. See *Customizing the Columns*.

Adding a Color Scheme

You can add new color schemes of the following types:

- TN3270 and BS2000 (also called mainframe color scheme)
- Natural UNIX and VT (also called VT color scheme)

As long as the Entire Screen Builder Server is not restarted with the System Management Hub, you can edit a new session. After a restart of the Entire Screen Builder Server, the new color scheme is also available in the System Management Hub. In this case, you can only modify the color scheme when you set the Entire Screen Builder Server to administration mode.

To add a color scheme

- From the **Action** menu, choose **New > color-scheme-type**.

Or:

From the context menu, choose **New > color-scheme-type**.

A new color scheme with the name "New Color Scheme" is created. You can now use the **Modify** command to define all required colors. See *Modifying a Color Scheme*.

Modifying a Color Scheme

When the Entire Screen Builder Server has been set to administration mode, a color scheme can be modified.

▶ To modify a color scheme

- Select the desired color scheme and from the **Action** menu, choose **Modify**.


Or:

Select the desired color scheme and from the context menu, choose **Modify**.

Or:

Double-click the desired color scheme.

A dialog box appears in which you can modify the color scheme. For example:

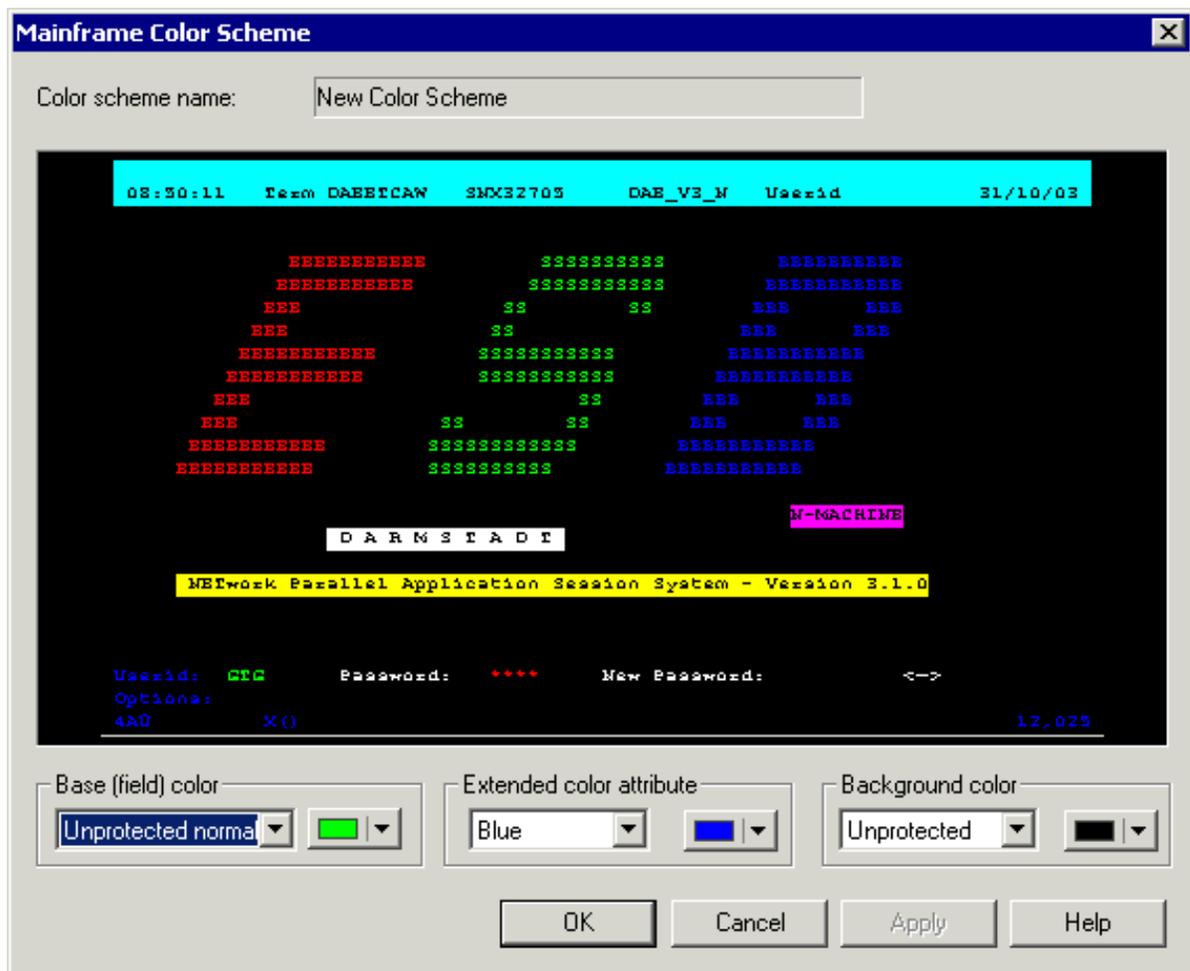

See *Mainframe Color Scheme* and *VT Color Scheme* in the *Individual Session Settings* documentation for detailed information on this dialog box.

Renaming a Color Scheme

When you rename a color scheme in the Color Schemes pane, this color scheme is also renamed in the System Management Hub.

The default color schemes "ibm3279", "bs2cols" and "VTCOLORS" cannot be renamed.

When the color scheme is not yet available in the System Management Hub, it can be renamed immediately. When it is already available in the System Management Hub, it can only be renamed in administration mode.

To rename a color scheme

1. Select the desired color scheme.
2. From the **Action** menu, choose **Rename**.

Or:

From the context menu, choose **Rename**.

Or:

Press F2.

The color scheme is selected.

3. Enter a new name for the color scheme and press ENTER.

A dialog box appears, asking whether you want to rename the color scheme.

4. Choose the **Yes** button to rename the color scheme.

Deleting a Color Scheme

When you delete a color scheme from the Color Schemes pane, this color scheme is also deleted in the System Management Hub.

The default color schemes "ibm3279", "bs2cols" and "VTColors" cannot be deleted.

When the color scheme is not yet available in the System Management Hub, it can be deleted immediately. When it is already available in the System Management Hub, it can only be deleted in administration mode.

To delete a color scheme

1. Select the desired color scheme(s).
2. From the **Action** menu, choose **Delete**.

Or:

From the context menu, choose **Delete**.

Or:

Choose the following toolbar button:



Or:

Press DEL.

A dialog box appears, asking whether you really want to delete the selected color scheme(s).

3. Choose the **Yes** button to delete the selected color scheme(s).