


Entire Operations Object Relationship Diagram

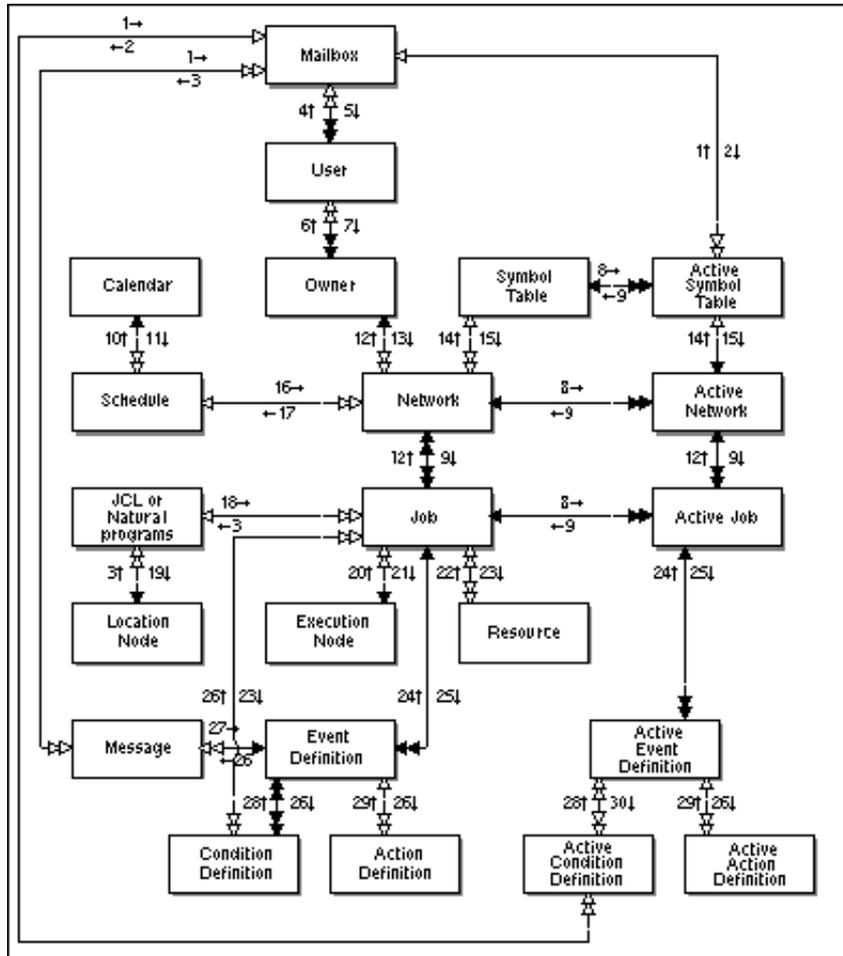

| | | |
|------------------------------|-----------------------------------|--|
| 1 = is sent to | 16 = schedules | ◀ must be only one ◁ none or at most one ◂ none or one or many ◄ must be at least one, can be more than one |
| 2 = contains prompting for | 17 = is scheduled on the basis of | |
| 3 = contains | 18 = is executed as | |
| 4 = uses / can use | 19 = resides on | |
| 5 = contains messages for | 20 = is platform for | |
| 6 = authorizes | 21 = runs on | |
| 7 = can choose | 22 = is preliminary condition for | |
| 8 = lends properties to | 23 = depends on / can depend on | |
| 9 = is composed of | 24 = determines result of | |
| 10 = is based on | 25 = is checked for | |
| 11 = is basis of | 26 = triggers | |
| 12 = belongs to | 27 = is set according to | |
| 13 = owns | 28 = is set or reset according to | |
| 14 = obtains parameters from | 29 = is performed according to | |
| 15 = contains values for | 30 = sets | |