


parameter

parameter

parameter

Each parameter may be an operand when calling the function. If a parameter is defined as OPTIONAL, the corresponding operand values may be omitted in the function call. In this case, use the *nX* notation or just omit this argument, where *n* is a whole integer greater than or equal to 1.

You can specify the session parameter AD for each argument.

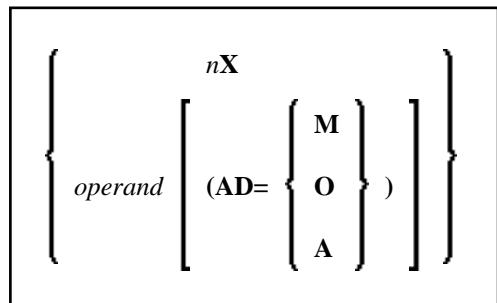

Operand	Possible Structure		Possible Formats												Referencing Permitted	Dynamic Definition	
operand	C	S	A	G		A	N	P	I	F	B	D	T	L	C	G	O

For an example of the proper usage of this function call, see the example in DEFINE PROTOTYPE statement.