


%T= - Activate Converter Routine for Device Type

Note:

This command is only relevant if Natural is used on mainframe computers under certain TP monitors.

Command Syntax

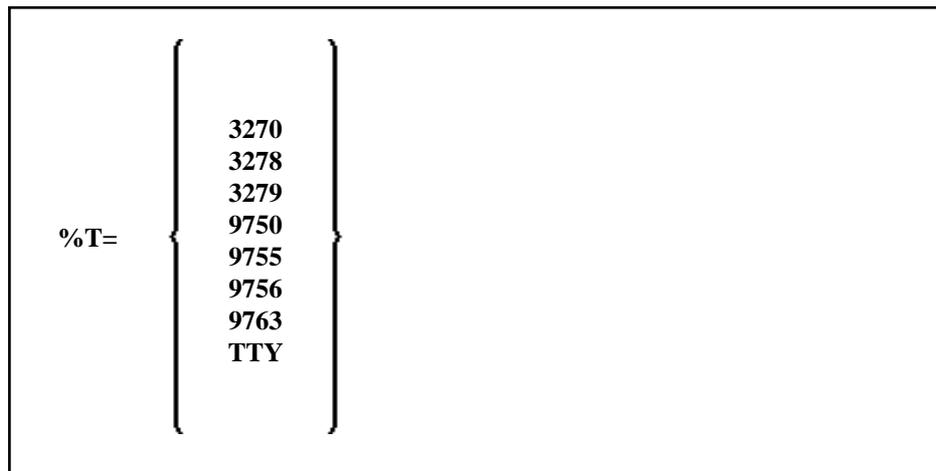

This command causes Natural to use the appropriate converter routine for the specified device type.

If the TP environment is not able to inform Natural of the physical terminal type it is working with (in which case the terminal type would be set automatically), this command may be used to specify the terminal type. This allows Natural to build the appropriate attribute sequence to operate the terminal.

The default terminal types used by Natural (if no information is passed from the TP environment) are %T=3270 (for IBM), or the value defined in PDN unless overridden by the parameter T975X (for Siemens; see Installing the Natural TIAM Interface in the Natural for Mainframes Installation Guide).

Instead of the %T= command, you can also use the profile parameter Terminal Type TTYPE (see the section Profile Parameters in the Parameter Reference documentation).

Note:

The above diagram lists only the most commonly used terminal types. If your terminal is of another type, ask your Natural administrator to check the NATCONFIG module to ascertain whether the terminal type can be specified with %T=.