


# Entire Operations Object Relationship Diagram

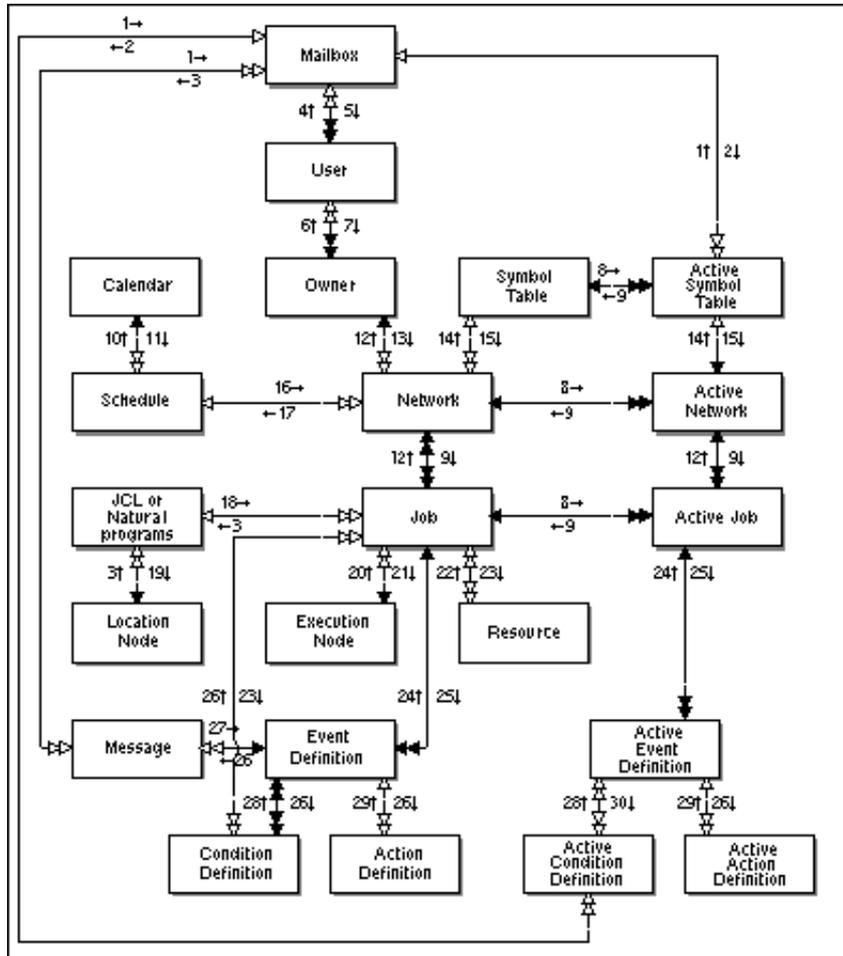

1 = is sent to	16 = schedules	◀ must be only one ◁ none or at most one ◂ none or one or many ◄ must be at least one, can be more than one
2 = contains prompting for	17 = is scheduled on the basis of	
3 = contains	18 = is executed as	
4 = uses / can use	19 = resides on	
5 = contains messages for	20 = is platform for	
6 = authorizes	21 = runs on	
7 = can choose	22 = is preliminary condition for	
8 = lends properties to	23 = depends on / can depend on	
9 = is composed of	24 = determines result of	
10 = is based on	25 = is checked for	
11 = is basis of	26 = triggers	
12 = belongs to	27 = is set according to	
13 = owns	28 = is set or reset according to	
14 = obtains parameters from	29 = is performed according to	
15 = contains values for	30 = sets	