


# SAG Environment

The general directory structure shown in the following figure and the environment variables which reference the specified directories are generated during installation.

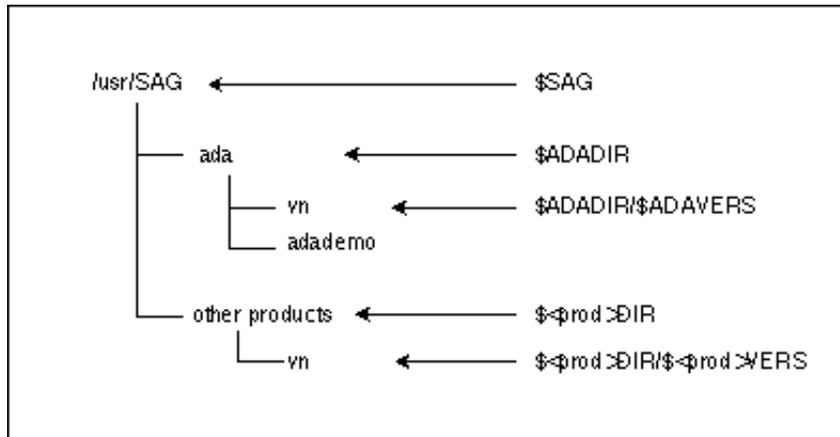

The environment variable **SAG** defines the root directory for all Software AG products and is usually the home directory of the administrator account.

For each product, the variable **\$<prod>DIR** is set to the path of the main directory of the product specified, where **<prod>** is a three-letter product code in uppercase letters. For example, all files for Adabas, whose product code is ADA, are contained in the directory **\$ADADIR**.

```

// JOB CARD
//V2COPY EXEC PGM=IEBCOPY
//SYSPRINT DD SYSOUT=A
//IN1 DD DSN=NOPnnn.JOBS,DISP=OLD,UNIT=TAPE,
// VOL=(,RETAIN,SER=XXXXXX),LABEL=(x,SL)
//OUT1 DD DSN=SAGLIB.NOPnnn.JOBS,DISP=(NEW,CATLG,DELETE),
// UNIT=SYSDA,VOL=SER=YYYYYY,SPACE=(CYL,(1,1,10))
//SYSIN DD *
C I=IN1,O=OUT1
/*
  
```

The name of the main directory is usually the same as the product code in lowercase letters. For example, the main directory for Adabas is named **ada**. However, there are exceptions to this rule. For example, the product code for Entire Net-Work is WCP but the environment variables use the prefix NET instead. Also, the product code for Predict is PRD but the environment variables use the prefix DIC.

Version-independent parts of the product, such as examples or data, are stored in a subdirectory of the product main directory. For example, all Adabas demo data is contained in the directory **\$ADADIR/adademo**.

Version-dependent components of the product are kept in the version directory **\$<prod>DIR/\$<prod>VERS**. For example, the current version of Adabas is stored in the directory **\$ADADIR/\$ADAVERS**.

The environment variables **\$<prod>DIR** and **\$<prod>VERS** for all products specified during installation are set in the file **sagenv**. The same applies for any other environment variables needed for the various products.