




# NATURAL

---

## Review Natural Monitor Version 3.6.3



This document applies to Review Natural Monitor Version 3.6.3 and to all subsequent releases. Specifications contained herein are subject to change and these changes will be reported in subsequent release notes or new editions.

© June 2002, Software AG  
All rights reserved

Software AG and/or all Software AG products are either trademarks or registered trademarks of Software AG. Other products and company names mentioned herein may be the trademarks of their respective owners.

# Table of Contents

<b>Review Natural Monitor - Overview</b>	1
Review Natural Monitor - Overview	1
<b>Introduction to Review Natural Monitor</b>	2
Introduction to Review Natural Monitor	2
What is Review Natural Monitor?	2
New Features and Enhancements	2
Prerequisite	2
<b>Installing Review Natural Monitor</b>	3
Installing Review Natural Monitor	3
General Installation Information	3
Installation Jobs	3
Using System Maintenance Aid	3
Prerequisites	3
Storage Requirements	3
Installation Tape - OS/390 Systems	4
Copying the Tape Contents to Disk	4
Installation Tape - VSE/ESA Systems	5
Copying the Installation Library from Tape to Disk	6
Installation Procedure	6
Step 1: INPL Review NM Objects	6
Step 1a: Delete Old Review NM Version	6
Step 2: Natural Security Definitions - if installed	7
Step 3: Load the Review NM Repository File	7
Step 4: Modify, Assemble and Link the Natural Parameter Module	7
Step 5: Link the Natural Nucleus with Review NM	8
Step 6: Modify, Assemble and Link the Review NM System Control Block	8
Step 7: Link the Review NM History Session Startup Module	9
Step 8: Add CICS Control Table Entries for Review NM	10
Step 9: Activate the Review NM Modules	11
Step 10: Initialize the Review User Profile Subsystem	11
Step 11: Initialize the Review NM Repository File	11
Step 12: Start the Review Natural Monitor Application	11
Step 13: Start the Review NM History Session	12
<b>Getting Started with Review Natural Monitor</b>	14
Getting Started with Review Natural Monitor	14
Review Natural Monitor Logon Procedure	14
Review Natural Monitor Main Menu	14
Using the Online Help System	15
Review Natural Monitor Function Codes	16
Review Natural Monitor Commands	16
Ending a Review Natural Monitor Session	17
<b>Accessing Natural Monitor</b>	19
Accessing Natural Monitor	19
Natural Monitor System Menu	20
Primary Functions and Subsystems	20
Data Storage Locations	21
Accessing Historical Data	21
<b>Using Response Time Reports</b>	22
Using Response Time Reports	22
What is a Response Time Report?	22
What are Report Processing Rules?	22
How are Reports Displayed?	23
What Reports are Supplied with Natural Monitor?	23

How are Reports Listed? . . . . .	24
How are Reports Named? . . . . .	24
Accessing the Response Time Subsystem . . . . .	24
Accessing the Edit Report Definition Screen . . . . .	25
Modifying Report Parameters . . . . .	26
Adding, Modifying, or Deleting Processing Rules . . . . .	28
Saving a Report Definition . . . . .	29
Starting or Restarting (Refreshing) a Report . . . . .	29
Starting a Report . . . . .	29
Refreshing a Report . . . . .	30
Listing Reports . . . . .	31
Listing Report Definitions . . . . .	31
Listing Started Reports . . . . .	33
Listing Historical Reports . . . . .	36
Listing Historical Snapshots . . . . .	37
Accessing Natural Monitor Tables . . . . .	39
Accessing the Detailed Records Table . . . . .	40
Accessing the Transaction Summary Table . . . . .	45
Using Vertical and Horizontal Graphs . . . . .	46
Interpretation of Graphs that List Totals . . . . .	47
Interpretation of Graphs that List Averages . . . . .	48
Commands Used to Control Graphs . . . . .	48
Accessing a Vertical Graph . . . . .	49
Accessing a Horizontal Graph . . . . .	50
Purging Report Definitions and Started Reports . . . . .	52
Purging a Started Report . . . . .	52
Purging a Report Definition . . . . .	52
Purging Historical Snapshot(s) . . . . .	52
<b>Active User Information . . . . .</b>	<b>54</b>
Active User Information . . . . .	54
Functional Overview . . . . .	54
Summary of Active Users Display . . . . .	54
Statistical Fields on the Summary of Active Users Display . . . . .	57
Additional Commands for the Summary of Active Users Function . . . . .	59
Lowest 20 Window . . . . .	60
Highest 20 Window . . . . .	61
Summary of Active User Window . . . . .	62
Accessing the Natural Call Table Window . . . . .	63
<b>Technical Information . . . . .</b>	<b>67</b>
Technical Information . . . . .	67
Functional Overview . . . . .	67
Purpose of the Technical Information Function . . . . .	67
Accessing the Technical Information Function . . . . .	67
Accessing the Environmental Information . . . . .	68
Accessing the History Session Control . . . . .	69
<b>Administrative Functions . . . . .</b>	<b>72</b>
Administrative Functions . . . . .	72
User Profile System . . . . .	72
Accessing the User Profile System . . . . .	72
Customizing the Default Profile . . . . .	73
Creating a User Profile . . . . .	76
Using the List User Profiles Function . . . . .	77
Editing a User Profile . . . . .	78
Copying a User Profile . . . . .	78
Purging a User Profile . . . . .	78
Using NATURAL User Exits . . . . .	79

- P-UEXIT1 . . . . . 79
- P-UEXIT2 . . . . . 79
- Using the Review Natural Monitor User Exit: Response Time Detail Record . . . . . 80
  - Calling Conventions to Invoke the User Exit . . . . . 80
- Accessing Historical Data in the NM Repository File . . . . . 81
- Setting Configuration Parameter Values . . . . . 82
  - P-NMCONF Response Time Parameters . . . . . 82
  - P-NMCONF Report Parameter . . . . . 83
  - P-NMCONF Historical Data Parameters . . . . . 83
- Function Codes and Commands . . . . . 84**
  - Function Codes and Commands . . . . . 84
  - Command Modes . . . . . 84
  - Function Codes . . . . . 84
  - Commands . . . . . 85
- Local Data Area View Description . . . . . 89**
  - Local Data Area View Description . . . . . 89
- Natural Monitor Repository File . . . . . 93**
  - Natural Monitor Repository File . . . . . 93



# Review Natural Monitor - Overview

This documentation contains all information required to install and use Review Natural Monitor.

- Introduction to Review Natural Monitor Provides a brief overview of Review Natural Monitor and lists the new features and enhancements available with this release.
- Installing Review Natural Monitor Explains how to install Review Natural Monitor under the operating systems OS/390 and VSE/ESA.
- Getting Started with Review Explains how to start and end a Review Natural Monitor session and describes the system-wide commands that may be used in Review Natural Monitor.
- Accessing Review Natural Monitor Explains how to access Natural Monitor.
- Using Response Time Reports Explains how to use response time reports.
- Active User Information Explains how to use active user information.
- Technical Information Explains how to display environmental information and history session information.
- Administrative Functions Explains how to administer Natural Monitor.
- Function Codes and Commands Gives an overview of the function codes and commands available within Natural Monitor.
- LDA View Description Describes the fields of the local data area (LDA) L-NMHIST.
- Natural Monitor Repository File Includes a copy of the repository file.

# Introduction to Review Natural Monitor

## What is Review Natural Monitor?

Review Natural Monitor is a monitoring facility that provides response time and user activity information about Natural applications running under the TP monitor CICS. The product includes a User Profile System which is an administrative facility used for defining access privileges to Review.

## New Features and Enhancements

The following new features and enhancements are available with the current version of Review Natural Monitor:

- User interface like that of Natural Version 3.1.
- Runs stand-alone in library SYSRNM.  
Can no longer be called from the old Review Menu of SYSREV used in Review Natural Monitor Version 3.5.

## Prerequisite

Review Natural Monitor Version 3.6.1 requires Natural for Mainframes Version 3.1.4.

# Installing Review Natural Monitor

This section describes step by step how to install Review Natural Monitor under the operating systems OS/390 and VSE/ESA. It covers the following topics:

- General Installation Information
  - Installation Tape - OS/390 Systems
  - Installation Tape - VSE/ESA Systems
  - Installation Procedure
- 

## General Installation Information

- Installation Jobs
- Using System Maintenance Aid
- Prerequisites
- Storage Requirements

## Installation Jobs

The installation of Software AG products is performed by installation jobs. These jobs are either created "manually" or generated by System Maintenance Aid (SMA).

For each step of the installation procedures described below, the job number of a job performing the respective task is indicated. This job number refers to an installation job generated by SMA. If you are not using SMA, an example installation job is provided in the job library on the Review Natural Monitor installation tape; you must adapt this job to your requirements.

## Using System Maintenance Aid

For information on using Software AG's System Maintenance Aid (SMA) for the installation process, please refer to the System Maintenance Aid Manual.

## Prerequisites

Natural Version 3.1.4 or above is required, for other prerequisites see the Natural Version 3.1.5 Release Notes.

The SYSRNM application is cataloged with Natural 3.1 and therefore it can run with Natural 3.1 only. However, it is possible to monitor Natural 2.3 sessions as well.

## Storage Requirements

The Review NM monitoring system requires CICS shared storage for collecting its monitoring data. For each Natural session, a user account area of 656 bytes is allocated plus space for a Natural call table (NCT). This table is used to track the Natural programs and database calls issued within a transaction. The number of NCT entries is determined by the NCTSIZE parameter in source member RNMSCB2 (see Step 6). Each table entry is 48 bytes long and the table contains 32 entries (default). This yields a total amount of  $656+32*48=2192$  bytes per running session. The storage is reused when the session terminates.

Each active response time report requires a basic control block that is 400 bytes long. Each detail record is 128 bytes long. The maximum number of detail records per report is controlled by the Number of Records in the report definition. If the Transaction Summary Option is set in the report definition, a 64 bytes transaction summary area is allocated for each transaction ID.

After a report has been written to the repository file by the history session, all report-dependent storage is released.

## Installation Tape - OS/390 Systems

The installation tape contains the datasets listed in the table below. The sequence of the datasets is shown in the **Report of Tape Creation** which accompanies the installation tape.

Dataset Name	Contents	Created by
RNM $nnn$ .SRCE	Source programs and macros	IEBCOPY
RNM $nnn$ .LOAD	Load modules	IEBCOPY
RNM $nnn$ .INPL	Natural system objects	NAT UNLOAD
RNM $nnn$ .JOBS	Example installation jobs	IEBCOPY
RNM $nnn$ .LDEL	Delete instructions for old objects.	NAT UNLOAD

The notation  $nnn$  in dataset names represents the version number of the product.

### Copying the Tape Contents to Disk

If you are using System Maintenance Aid (SMA), refer to the SMA documentation (included on the current edition of the Natural documentation CD).

If you are **not** using SMA, follow the instructions below.

This section explains how to:

- Copy data set COPY.JOB from tape to disk.
- Modify this data set to conform with your local naming conventions.

The JCL in this data set is then used to copy all data sets from tape to disk.

If the datasets for more than one product are delivered on the tape, the dataset COPY.JOB contains the JCL to unload the datasets for all delivered products from the tape to your disk.

After that, you will have to perform the individual install procedure for each component.

#### Step 1 - Copy data set COPY.JOB from tape to disk

The data set COPY.JOB (label 2) contains the JCL to unload all other existing data sets from tape to disk. To unload COPY.JOB, use the following sample JCL:

```
//SAGTAPE JOB SAG,CLASS=1,MSGCLASS=X
//* -----
//COPY EXEC PGM=IEBGENER
//SYSUT1 DD DSN=COPY.JOB,
// DISP=(OLD,PASS),
// UNIT=(CASS,,DEFER),
// VOL=(,RETAIN,SER=<Tnnnnn>),
// LABEL=(2,SL)
//SYSUT2 DD DSN=<hilev>.COPY.JOB,
// DISP=(NEW,CATLG,DELETE),
// UNIT=3390,VOL=SER=<vvvvvv>,
// SPACE=(TRK,(1,1),RLSE),
// DCB=*.SYSUT1
//SYSPRINT DD SYSOUT=*
//SYSIN DD DUMMY
//
```

Where:

- <hilev> is a valid high level qualifier
- <Tnnnnn> is the tape number
- <vvvvvv> is the desired volser

### Step 2 - Modify COPY.JOB to conform with your local naming conventions

There are three parameters you have to set before you can submit this job:

- Set HILEV to a valid high level qualifier.
- Set LOCATION to a storage location.
- Set EXPDT to a valid expiration date.

### Step 3 - Submit COPY.JOB

Submit COPY.JOB to unload all other data sets from the tape to your disk.

## Installation Tape - VSE/ESA Systems

The installation tape contains the datasets listed in the table below. The sequence of the datasets is shown in the **Report of Tape Creation** which accompanies the installation tape.

Dataset Name	Contents	Created by
RNMnnn.LIBR	Installation sublibrary	LIBR BACKUP
RNMnnn.INPL	Natural system objects	NAT UNLOAD
RNMnnn.LDEL	Delete instructions for old objects.	NAT UNLOAD

The notation *nnn* in dataset names represents the version number of the product. The following sublibrary member types are used:

<b>.A</b>	Assembler source code, examples etc.
<b>.E</b>	Edited macros
<b>.J</b>	Installation jobs
<b>.OBJ</b>	Object modules

## Copying the Installation Library from Tape to Disk

If you are not using System Maintenance Aid, adapt and run the job RNMTAPE to copy the datasets from tape to disk. RNMTAPE.J is contained in the installation sublibrary on the Natural installation tape. It assumes one library SAGLIB defined in VSE standard labels, which has installation sublibraries for each Software AG product and creates a new sublibrary RNM $nnn$  for Review Natural Monitor.

The following values must be supplied in the JCL:

- With the ASSGN and MTC statements, replace *cuu* with the tape unit address.
- In the dataset names, replace *nnn* with the current version number of the datasets.
- With the VOL parameter, replace *xxxxxx* with the volume serial number of the tape.
- With the FSF parameter, replace *mm* with the sequential number of the tape file (see the **Report of Tape Creation**).

The dataset type and the space each dataset requires on disk are shown in the **Report of Tape Creation**.

```
* $$ JOB JNM=RNMTAPE,CLASS=0,DISP=D
* $$ LST CLASS=A,DISP=D
// JOB RNMTAPE
// ASSGN SYS005,IGN
// ASSGN SYS006, cuu, VOL=xxxxxx
// MTC REW, cuu
// MTC FSF, SYS006, mm
// EXEC LIBR, PARM=ŸMSHPŸ
DEFINE SUB=SAGLIB.RNMnnn, REUSE=AUTO, R=Y
RESTORE SUBLIB=SAGLIB.RNMnnn: SAGLIB.RNMnnn -
TAPE=SYS006 LIST=YES REPLACE=NO
/*
// MTC REW, SYS006
/&
* $$ EOJ
```

## Installation Procedure

This section describes the actual installation steps after restoring the installation tape.

### Step 1: INPL Review NM Objects

(Job I061, Steps 2620, 2621)

Review NM now runs in the new library SYSRNM, without Review DB or DC.

Load the Review NM Natural objects (SYSRNM application) into your Natural 3.1 system file (FNAT) from where you want to use the SYSRNM application. It is not required to INPL Review NM on all system files you want to monitor. You may use any of your site-dependent Natural INPL JCL to accomplish this or use the sample job RNMINPL provided in the Review NM source library.

### Step 1a: Delete Old Review NM Version

If you want to delete an old installed Review NM, INPL the dataset RN $nnn$ .LDEL.

## Step 2: Natural Security Definitions - if installed

(Job I100, Step 2210)

If you want to run Review NM under Natural Security, the Review NM Natural library SYSRNM must be defined in Natural Security. The SYSREV and SYSREVN libraries from previous versions are no longer used.

SYSRNM can have a startup menu. If the library is defined as private (i.e. with NSC parameter PEOPLE=Y), each user of this library must be linked to it.

Define REVHIST as a **person** with a default application of SYSRNM. REVHIST is used as the user ID by the Review NM history session.

## Step 3: Load the Review NM Repository File

(Job I050, Steps 2620, 2621)

The Review NM repository file is an Adabas file used for storing response time reports and history data. The format of the Review NM repository file is compatible with previous versions. If you have already installed a repository file, you may continue to use it and omit this step.

It is possible to share the repository file across several CICS regions. Any Adabas file can be used to contain the Review NM repository file. The corresponding file number must be defined to Natural as a logical system file (see Step 4). The repository file has to be initialized via Natural (see Step 11).

Load the Review NM repository file using SMA or the job RNMLOAD provided in the Review NM source library. Modify this job as follows before submitting it:

- Change the dataset definitions according to your site.
- Change DB=NNN in the ADARUN statements to correct database ID.
- Change SVC=NNN to the correct Adabas SVC number.
- Select the appropriate ADALOD NAME=??? statement for the version of Review NM you are running.
- Change the FILE=NNN statements to reflect the number of the Adabas file that will contain the Review NM repository file.

## Step 4: Modify, Assemble and Link the Natural Parameter Module

(Job I060, Steps 0010, 0015)

You can monitor Natural 2.3 and 3.1 sessions with Review NM. Include the following parameter settings in the Natural parameter module(s):

```
NTPRM ...  
RDCSIZE=2,  
MADIO=5000,  
MAXCL=0  
NTFILE ID=180,DBID=???,FNR=???
```

The parameter RDCSIZE determines whether a session is monitored by Review NM.

**Note:**

If you set RDCSIZE=0 (this is the default) for a session, it is not monitored by Review NM.

The NTFILE (or dynamic LFILE parameter) definition determines the repository file being used by the SYSRNM application for retrieving and maintaining report definitions and history report data. For the history session, it determines the repository file in which the history report data is stored. The DBID=??? and FNR=??? subparameters must be set to the correct values for the Review NM repository file (see Step 3). The currently

accessed repository file can be changed using the LFILE command within the SYSRNM application.

If you want to link the Review NM monitor interface module separate from the Natural nucleus (see Step 6) by means of the RCA technique, the following parameter is required:

```
RCA=NATGWREV
```

## Step 5: Link the Natural Nucleus with Review NM

(Job I060, Step 0020)

Relink all your Natural nuclei you want to monitor with Review NM, including the following module from the Review NM load library RNMLIB:

```
INCLUDE RNMLIB(RNMNUC2)
```

Review NM uses the Natural Data Collector exit interface to get data from Natural. For more information about the SYSRDC Data Collector, see SYSRDC Utility in the section Debugging and Monitoring.

The Review NM nucleus RNMNUC2 supports all different ways of statically linked Natural subprograms. For more information about linking the Natural nucleus, see Linking Natural Objects to the Natural Nucleus in the **Natural Operations documentation**. If you run a shared Natural nucleus for multiple environments (e.g. CICS, batch, etc.), you should link RNMNUC2 to the environment-dependant Natural CICS nucleus, because Review NM monitoring runs under CICS only. This prevents unnecessary overload in your non-CICS systems.

If RNMNUC2 is not linked to the Natural CICS nucleus, the following CICS Assembler command level stub from the CICS load library must be linked to RNMNUC2:

```
INCLUDE CICSLIB(DFHEAI)
```

Instead of linking RNMNUC2 to the Natural nucleus, you can link it as a separate module defined with profile parameter RCA. The following linkage editor statements are then required:

```
MODE RMODE(ANY)
  INCLUDE CICSLIB(DFHEAI)
  INCLUDE RNMLIB(RNMNUC2)
  ENTRY NATGWREV
  NAME NATGWREV
```

The MODE statement is optional. A CICS PPT entry is required for module NATGWREV. It must be specified with the RCA parameter (see Step 4). The module can be shared between multiple Natural 2.3 and 3.1 nuclei.

## Step 6: Modify, Assemble and Link the Review NM System Control Block

(Job I070, Steps 2622, 2623)

The Review NM System Control Block RNMSCB2 is defined as a program in CICS. RNMSCB2 is not an executable program. Its storage is used by Review NM as the common anchor and control point for all monitored Natural sessions and reports within one CICS address space. There are some installation-specific generation parameters you can specify in member RNMSCB2 in the Review NM source library.

The following parameters can be specified in RNMSCB2:

<b>NATTRAN=</b>	This is the NATURAL/CICS transaction code for the Review NM history session. You must specify this parameter to set the correct Natural transaction code (see Step 8).				
<b>NPARMS=</b>	Additional dynamic Natural parameters for the Review NM history session. This parameter is optional.				
<b>CLOSE=</b>	<p>This parameter determines whether any started Review NM reports are closed automatically during the termination of the Review NM history session. There are two possible values:</p> <p>CLOSE=YES: All started reports are closed.</p> <p>CLOSE=NO: Started reports are not closed.</p> <p>The default value is CLOSE=YES. In previous versions of Review NM, started reports were not closed during termination of the history session.</p>				
<b>DATE=</b>	<p>The date format used in the records stored in the Review NM repository file. There are two possible values:</p> <table border="1" data-bbox="359 835 908 936"> <tr> <td>DATE=OLD</td> <td>The date format is YY/MM/DD</td> </tr> <tr> <td>DATE=NEW</td> <td>The date format is YYYYMMDD</td> </tr> </table> <p>The default value is DATE=OLD. This is the format that previous releases of Review NM have used. If you have any existing user-written reporting programs extracting the repository file, you may have to change them if you want to use DATE=NEW.</p>	DATE=OLD	The date format is YY/MM/DD	DATE=NEW	The date format is YYYYMMDD
DATE=OLD	The date format is YY/MM/DD				
DATE=NEW	The date format is YYYYMMDD				
<b>EMPTY=</b>	<p>This parameter determines whether empty history records are stored in the Review NM repository file. A record is considered as "empty", if no transactions occurred within the report time interval. There are two possible values:</p> <table border="1" data-bbox="359 1205 949 1305"> <tr> <td>EMPTY=YES</td> <td>Empty history records are stored.</td> </tr> <tr> <td>EMPTY=NO</td> <td>Empty history records are not stored.</td> </tr> </table> <p>The default value is EMPTY=NO. In previous versions of Review NM, empty records were stored.</p>	EMPTY=YES	Empty history records are stored.	EMPTY=NO	Empty history records are not stored.
EMPTY=YES	Empty history records are stored.				
EMPTY=NO	Empty history records are not stored.				
<b>NCTSIZE=</b>	This parameter determines the number of entries in the Natural Call Table (NCT) of Review. The NCT is allocated in CICS shared storage and is used to track the usage of the Natural programs per session. The default value is NCTSIZE=32.				

Modify and run job RNMASMB to generate the Review NM System Control Block. The module must be linked with the NORENT option. The target link library can be any library defined to CICS.

## Step 7: Link the Review NM History Session Startup Module

(Job I070, Step 2625)

Review NM history data is written to the repository file by an asynchronous (i.e. not terminal-bound) Natural session. Modify and run job RNMLINK in the Review NM source library. It links the CICS-dependant history session startup module RNMHIST2. The target link library can be any library defined to CICS.

You can run the Review NM asynchronous history session with Natural 3.1 only. Within one CICS address space there can be only one history session. The Review NM application (see Step 1) must be loaded to the FNAT system file running with the history session.

## Step 8: Add CICS Control Table Entries for Review NM

(Job I005, Step 2201)

Define the following CICS table entries with RDO. If you still have assembled CICS tables, you find sample table entries in member RNMTBLS in the Review NM source library. You may have to include additional parameters due to your site requirements (e.g. security keys etc.). For CICS version 3 or higher, Review supports transaction isolation (i.e. it can run in user key).

### Program Control Table (PCT):

Define the Review NM history session start/stop transaction:

```
CEDA DEFINE TRANSACTION(RVH1) PROGRAM(RNMHIST2)
      GROUP(RNM36)
```

Define the Review NM asynchronous Natural history session transaction:

```
CEDA COPY TRANSACTION(XXXX) GROUP(YYYY) AS(RVH2)
      TO(RNM36)
```

This copies your existing Natural transaction ID `xxxx` from your Natural definition group `yyyy` as an alias transaction for Review NM. This definition is optional and you may use the online Natural transaction code `xxxx` as well, but it helps the administrator to identify the Review NM asynchronous history session.

The transaction codes `RVH1` and `RVH2` can be chosen freely (i.e. you may change them if desired). The Natural session transaction code must be the same as defined with parameter `NATTRAN` (in this example `NATTRAN=RVH2`) in Step 6.

### Processing Program Table (PPT):

Define the Review NM history session start/stop program:

```
CEDA DEFINE PROGRAM(RNMHIST2) LANGUAGE(ASSEMBLER)
      GROUP(RNM36)
```

Define the Review NM system control block:

```
CEDA DEFINE PROGRAM(RNMSCB2) LANGUAGE(ASSEMBLER)
      RESIDENT(YES) GROUP(RNM36)
```

After entering the online definitions, activate them using `CEDA INSTALL GROUP(RNM36)`. The new `GROUP` should be added to the `GRPLIST` defined for CICS coldstart.

### Program List Tables CICS Startup and Shutdown (PLTPI and PLTSD):

Define the Review NM history session start/stop program:

```
DFHPLT TYPE=ENTRY, PROGRAM=RNMHIST2
```

This table entry is optional. You may use it for automatic start and termination of the Review NM history session during CICS startup and shutdown. Insert the table entry in your assembled `PLTPI` and/or `PLTSD` CICS table. This avoids manual starting and stopping of the Review NM history session (see Step 13).

## Step 9: Activate the Review NM Modules

If you have assembled CICS tables or if you cannot copy the Natural nucleus module(s) with RNMNUC2 and NATPARM linked, you have to restart CICS. Otherwise, just copy the linked Natural nucleus module(s), to which RNMNUC2 and the modified NATPARM are linked, by means of transaction CEMT:

```
CEMT SET PROGRAM(. . . .) NEWCOPY
```

## Step 10: Initialize the Review User Profile Subsystem

(Job I100, Step 2622)

The User Profile Subsystem is no longer shared between the three Review products (DB, DC and NM).

This step is no longer required, since the profile text member DEFAULT will be delivered with the Natural INPL and will be copied to SYSRNM.

If you have a previous version of Review NM installed and you want to keep the user profiles, use online SYSMAN to copy the profile text members from SYSREVUS to SYSRNM.

Nevertheless, you can re-initialize the User Profile Subsystem. Logon to library SYSRNM and enter the following on the NEXT prompt:

```
INSTALL UP
```

The following message will then appear:

```
Default user Profile installed
```

## Step 11: Initialize the Review NM Repository File

(Job I100, Step 2624)

After loading the Review NM repository file (see Step 3), you must initialize it. If your repository file is already initialized, skip this step.

During the initialization process, two default response time reports are added. To initialize the Review NM repository file, logon to library SYSRNM and enter the following on the NEXT prompt:

```
INSTALL NM
```

The following messages will then appear:

```
Now creating sample report system response time
  Now creating sample report highest response
  Review Natural Monitor repository initialization complete.
  Press <ENTER> to continue
```

## Step 12: Start the Review Natural Monitor Application

Each time you want to start the Review NM application, logon to library SYSRNM and enter the following:

```
MENU
```

or enter SYSRNM anywhere at the NEXT prompt.

Either the Review NM logo screen (see below) or the Review NM Main Menu screen appears.

```

10:10:45          ***** Review NM UTILITY *****          2000-08-08

      RRRRRRRR      EEEEEEEE      VVV      VVV      III      EEEEEEEE      WWW      WWW
      RRRRRRRRRR      EEEEEEEE      VVV      VVV      III      EEEEEEEE      WWW      WWW
      RRR  RRR      EEE      VVV      VVV      III      EEE      WWW      WWW
      RRR  RRR      EEE      VVV      VVV      III      EEE      WWW      WWW
      RRRRRRRR      EEEEEEEE      VVV      VVV      III      EEEEEEEE      WWW      W      WWW
      RRRRRRRR      EEEEEEEE      VVV      VVV      III      EEEEEEEE      WWW      WW      WWW
      RRR  RRR      EEE      VVV      VVV      III      EEE      WWW      WWWWW      WWW
      RRR  RRR      EEE      VVV      VVV      III      EEE      WWW      WWWWWW      WWW
      RRR  RRR      EEEEEEEE      VVVVVV      III      EEEEEEEE      WWWWW      WWWWW
      RRR  RRR      EEEEEEEE      VVVV      III      EEEEEEEE      WWW      WWW
    
```

N A T U R A L M O N I T O R 3.6.1

A P R O D U C T O F S O F T W A R E A G

If the Review NM logo screen is shown, press Enter to invoke the Review NM Main Menu screen. The Review NM logo screen can be suppressed by specifying BANNER=N in the text member CONFIG in library SYSRNM.

When the Review NM Main Menu screen is shown, you can enter the Review NM subsystem IDs NM (Natural Monitor) or UP (User Profiles). The main screen for the desired subsystem is then shown.

For installation verification, enter NM and then the TE command. You can then check your installation parameters and the status of the history session.

### Step 13: Start the Review NM History Session

If you want to run history reports, the history session must be started. It runs as an asynchronous (non-terminal) Natural session and writes the collected report data to the repository file each time a report time interval has expired. You can start and stop the history session using the CICS PLTPI/PLTSD (see Step 8) or manually.

For manual starting and stopping of the history session, the RVH1 transaction (see Step 8) can be used in the following ways:

<b>RVH1</b>	Start the Review NM history session. The history session can also be started with the START command of Review NM.
<b>RVH1 STOP</b>	Terminate the Review NM history session. The history session can also be terminated with the STOP command on the TE HC screen or with the TERMNAT command on the SA screen of Review NM.
<b>RVH1 TEST</b>	Start the Review NM history session on the current terminal. This option may be used for debugging purposes, e.g. to debug the history session with CEDF (the CICS Debugging Facility). Note that no Natural terminal I/Os are supported during the normal processing of the history session. Therefore, you have to terminate the history session from another terminal.

After starting the history session, the following message should appear:

```
REV20200 - REVIEW NM HISTORY SESSION STARTED
```

Check the Review NM initialization messages on the console log of your CICS system to find out whether the history session has started successfully. Any error messages from the history session are displayed on the operator console log.

If desired, you can get a more detailed explanation of the messages in Review NM. Just enter MSG followed by the message number on the command line of Review NM.

# Getting Started with Review Natural Monitor

This section describes the procedures for logging on to Review Natural Monitor, using the online help system, using function codes, PF keys and commands, and ending your Review Natural Monitor session.

This section covers the following topics:

- Review Natural Monitor Logon Procedure
  - Review Natural Monitor Main Menu
  - Using the Online Help System
  - Review Natural Monitor Function Codes
  - Review Natural Monitor Commands
  - Ending a Review Natural Monitor Session
- 

## Review Natural Monitor Logon Procedure

Review Natural Monitor is a standard Natural application that resides in the Natural library SYSRNM.

### To access Review Natural Monitor:

1. Access Natural as you do normally.
2. At the NEXT prompt, enter LOGON SYSRNM and then MENU, or enter SYSRNM at the NEXT prompt.

When you have successfully logged on to Review Natural Monitor, either the Review Natural Monitor logo screen or the Main Menu screen (see below) is displayed.

## Review Natural Monitor Main Menu

If you press Enter from the Review NM logo screen, the Review Natural Monitor Main Menu, similar to the one shown below, is displayed.

```

10:11:35          ***** REVIEW NM UTILITY *****          2000-08-08
                    - Main Menu -

Code  Function

NM    Natural Monitor System
UP    User Profile System

REV00001 - Welcome to Review NM running under CICS
Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help           Exit                                 Fin

```

The Main Menu displays the Review Natural Monitor systems available at your site.

Your Review Natural Monitor user profile may be configured to bypass the Review Natural Monitor Main Menu and display one of the system menus instead.

The Main Menu provides access to the two systems of Review Natural Monitor. On the command line, type the code that corresponds to the system you wish to use, and press Enter.

Depending on how Review Natural Monitor is configured at your site, you may use any or all of the following systems:

Code	System	Description
NM	Natural Monitor	Used to obtain response time and user information about Natural applications running under CICS.
UP	User Profile	Used to create user profiles that define access privileges to Review Natural Monitor.

## Using the Online Help System

Online help is available for Review Natural Monitor systems and functions at any time during the Review Natural Monitor session. You may view general help screens describing functions and commands or, if available, help windows for a specific data entry field:

### ▶ To access the general help screens:

- Press PF1 or enter the HELP command on the command line.

### ▶ To access specific help windows for options available in lists:

- Enter a "?" on the data entry field (Sel column). If specific help is not available, the general help for the screen is displayed.

### ▶ To access help about another context than the current:

- Enter a "?" or HELP followed by the function code or command on the command line (NM system only).

The following PF keys are available within the online help system:

PF Key	Command	Description
PF3	Exit	Exit from the display.
PF7	-	Scroll one page backwards.
PF8	+	Scroll one page forward.
PF9	--	Scroll to the top of the text.
PF10	++	Scroll to the bottom of the text.

## Review Natural Monitor Function Codes

Review Natural Monitor systems are menu-driven. A series of function codes and commands are used to navigate through the systems.

Function codes are used to access both the Review Natural Monitor systems and the functions within each system. Functions within systems may contain several "layers" of screens.

Entering a single function code accesses one layer at a time; entering a string of function codes enables you to bypass intervening screens and go directly to the screen you want.

For example, you can display the Summary of Active Users screen by entering the following string on the command line of the Review Natural Monitor Main Menu:

```
NM SA
```

The NM code accesses the Natural Monitor system, and the SA code accesses the Summary of Active Users screen.

Similarly, you can list the reports that have been started on the Natural Monitor system by entering the following on the command line of the Review Natural Monitor Main Menu:

```
NM RT LS
```

The NM code accesses the Natural Monitor system, the RT code accesses the Response Time Subsystem, and the LS code accesses the Started Reports screen.

## Review Natural Monitor Commands

Commands are used to perform specific tasks within a function.

### To issue a Review Natural Monitor command:

- Type the command on the command line and press Enter; or press the PF key corresponding to the command, if applicable.

A command may be included in a string, provided the command is the last element.

Some commands are standard throughout Review Natural Monitor, and may be issued from any screen. These include:

Command	PF Key	Description
COLOR OFF		Return to a noncolor display.
COLOR ON		Display color attributes, if applicable.
EXIT	PF3	Terminate the function and return to the menu screen that precedes it.
FIN or QUIT	PF12	Terminate the Review Natural Monitor session. Assigned to PF12 on the Review Natural Monitor Main Menu. On all other screens PF12 returns you to the Review Natural Monitor Main Menu.
HELP or ?	PF1	Display the help screens for a particular screen or field. The "?" is used to display help for a specific field. A keyword may be entered after HELP.
LFILE		Display the used system files and allow to change the Review Natural Monitor repository files.
LOGO		Display the logo screen.
LOGON <i>library</i>		Log on to the specified Natural library.
MENU	PF12	Terminate the function, and return to the Review Natural Monitor Main Menu, except when you are already on the Review Natural Monitor Main Menu. There PF12 terminates the Review Natural Monitor session.
MSG		Display detailed explanations of Review Natural Monitor messages. May be issued with or without a message number. If no message number is included, Review Natural Monitor displays the explanation for the last message received.
REVPROD		Display the version number of the Review Natural Monitor subsystems being used in the current session of Review Natural Monitor.

The following PF keys are available on most Natural Monitor screens:

PF Key	Command	Description
PF1	Help	Access the help system.
PF3	Exit	Exit from the display.
PF12	Menu	Return to the Review Natural Monitor Main Menu.

Other Review Natural Monitor commands and PF keys are local to a particular system or function. These commands are usually shown on the relevant screen and have PF keys assigned to them.

Commands used in the list functions are not displayed on the screen. These commands may be displayed by using the online help system.

Examples of list functions include the List Started (LS) Reports functions in the Natural Monitor system, and the List User (LU) Profiles function in the User Profile System.

## Ending a Review Natural Monitor Session

There are several ways to end a Review Natural Monitor session. Any one of the following may be used:

- ▶ **To end the function you are using and return to the menu from which the function was called:**

- Press PF3;  
or enter the EXIT command on the command line and press Enter.

▶ **To end the function you are using and return to the Review Natural Monitor Main Menu:**

- Press PF12;  
or enter the MENU command on the command line and press Enter.

▶ **To end your Review Natural Monitor session while on the Review Natural Monitor Main Menu:**

- Press PF3 (Exit);  
or press PF12 (Fin).

▶ **To end your Review Natural Monitor session from the command line of any Review Natural Monitor function:**

- Enter the FIN command on the command line and press Enter;  
or enter the QUIT command on the command line and press Enter.

# Accessing Natural Monitor

Natural Monitor (NM) provides response time reporting and user activity analysis for Natural applications running under the Customer Information Control System (CICS).

Within Natural Monitor, most statistics are gathered for a transaction, which occurs each time Enter or a PF key is pressed.

The major features of Natural Monitor include the following:

- **Response Time Reporting Subsystem**

Provides transaction reports and response time graphs for a user-specified time interval.

If specified, the user may also generate the following displays for a specific report:

- **Detailed Records Display**

Provides response time information about a user's transactions that exceed a user-defined response time threshold.

- **Transaction Summary**

Provides information about transaction usage and performance. Transaction summary information is available for Natural at the application level.

- **Historical Snapshots**


Provides pictures of data at previous times. These pictures, similar to the display of current data, are generated for specific time intervals. Anyone who defines reports can collect history data.

- **Summary of Active Users**

Shows the usage of system resources by users who are currently logged on and active in Natural.

- **Technical Information**

Displays environmental information including history session information.

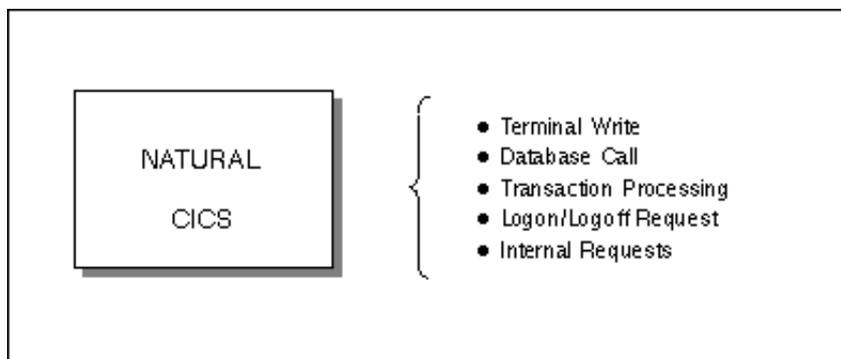

The figure above shows significant monitoring points between Natural and Natural Monitor. The Natural Monitor user interface allows the user to display data from these various monitoring points to evaluate performance and fine tune the system.

This section covers the following topics:

- Natural Monitor System Menu
- Primary Functions and Subsystems
- Data Storage Locations
- Accessing Historical Data

# Natural Monitor System Menu

**▶ To access the Natural Monitor System menu**

- Type NM on the command line in the Review Natural Monitor Main Menu and press Enter.

The menu appears as shown below:

```

10:12:22                ***** REVIEW NM UTILITY *****                2000-08-08
                        - NM Main Menu -

                        Code  Function
                        RT   Response Time Subsystem
                        SA   Summary of Active Users
                        TE   Technical Information

Command ===>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help           Exit                                           Canc
    
```

The functions shown on the menu are described in the following table:

Code	Function	Description
RT	Response Time Subsystem	Provides information about response times experienced by Natural end users and about heavily used Natural transactions. Reports may also be displayed indicating which Natural transactions are being most heavily used.
SA	Summary of Active Users	Displays information about the system activity of Natural users who have logged on since the last initialization of CICS.
TE	Technical Information	Displays environmental information including history session information and control.

## Primary Functions and Subsystems

The Natural Monitor System menu includes three primary functions and one subsystem:

- A primary function consists of one or more screen displays.
- A subsystem consists of several subfunctions.


The subsystem is labeled as such. The other items on the menu are primary functions.

The subsystem and the primary functions are reflected in the menu structure of Natural Monitor. The following is a diagram of the Natural Monitor system and the function codes used to access each function.

**Note:**

See Function Codes and Commands for a discussion of all function codes, PF keys, and commands used within Natural Monitor.

Review Natural Monitor System Diagram

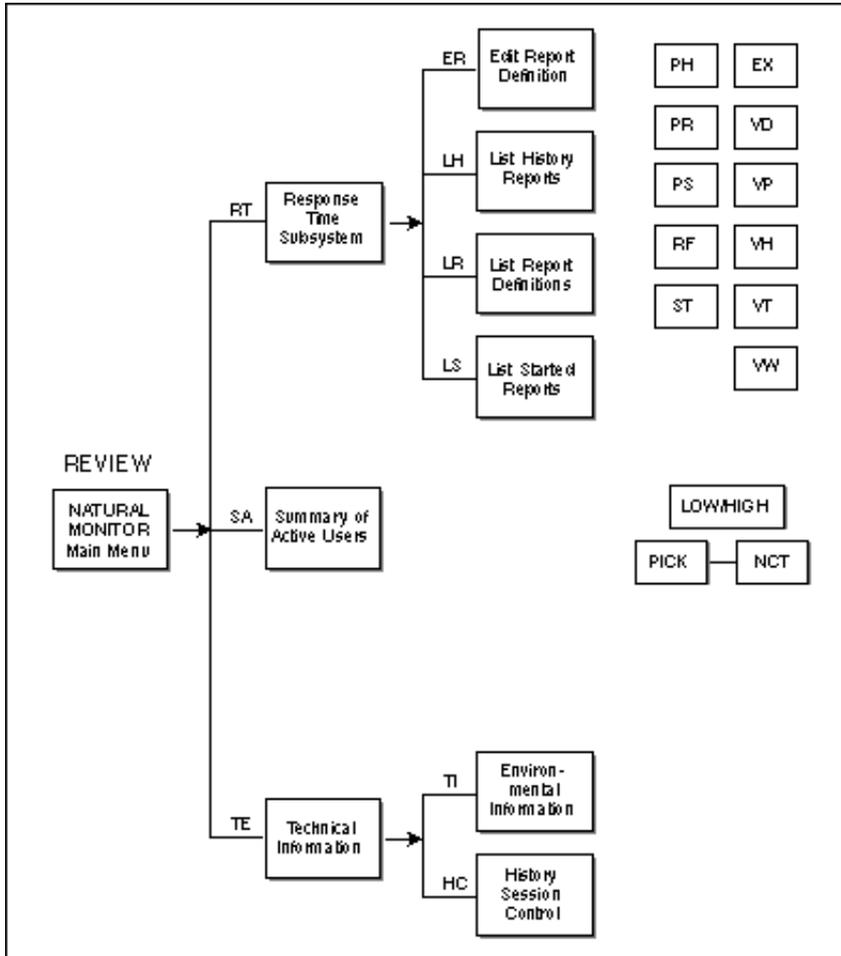

## Data Storage Locations

Natural Monitor uses the Natural system file (FNAT) and the Natural Monitor repository for storing data:

- The Natural system file (FNAT) is used for storing the user profiles.
- The Natural Monitor repository is an Adabas file used for storing response time report definitions and historical data.

## Accessing Historical Data

Historical data are available for viewing as historical snapshots of previously collected data. Natural Monitor captures historical data only for the Natural Monitor Response Time subsystem. The method used to access historical data is described in section Using Response Time Reports.

# Using Response Time Reports

Natural Monitor (NM) provides response time reports. This section discusses the types and components of these reports and how they are created, modified, and used.

This section covers the following topics:

- What is a Response Time Report?
  - Accessing the Response Time Subsystem
  - Starting or Restarting (Refreshing) a Report
  - Listing Reports
  - Accessing Natural Monitor Tables
  - Using Vertical and Horizontal Graphs
  - Purging Report Definitions and Started Reports
- 

## What is a Response Time Report?

The Response Time Subsystem enables you to retrieve information about the response times experienced by end users of Natural under the Customer Information Control System (CICS).

**Response time** is the amount of time, in seconds, required to process a user's transaction. A **transaction** is registered each time the Enter key or a PF key is pressed.

Response time information is collected by the Natural Monitor processor according to instructions in a **response time report definition** which consists of the following:

- A set of parameters specifying the data to be captured.
- A set of report and historical data parameter options for specifying conditions of report processing.
- A set of processing rules identifying the conditions under which that data is to be captured.

The Edit Report (ER) function provides a fill-in-the-blank screen to help you create or modify a response time report definition. Once you have entered all parameter values and processing rules on the Edit Report Definition screen, you can issue the SAVE command to write the report definition to the Natural Monitor repository file.

Data accumulation for a particular report begins when you **start** the report. Report results are automatically saved until the report is **refreshed** (restarted) or **purged**.

A report may be viewed online. Report results are displayed as tables and graphs.

Two response time report definitions are supplied with Natural Monitor. These reports may be used without change, or they may be customized to meet the requirements of your particular site. You may also create your own reports.

## What are Report Processing Rules?

Report processing rules allow you to restrict the data that a report collects. Four fields are used to specify processing rules:

- TP User ID
- Transaction program name
- Natural application
- Natural program

Each field may contain one of the following processing rules:

- A blank (collect all data)
- A single value
- A wild card

For example, the user ID SAGAA is a single value, and SB\* is a wild card created by placing an asterisk after at least one other character. This wild card will result in all user IDs beginning with the characters SB being selected for processing.

Alphanumeric or numeric characters may be entered, but a hexadecimal value is **not** permitted.

If data is entered in more than one field, Natural Monitor uses "AND" logic for data collection.

## How are Reports Displayed?

The following displays are available for each report:

- Detailed Records providing information sorted by user
- Transaction Summary providing information sorted by transaction
- Vertical Graph
- Horizontal Graph

### Detailed Records Display

The Detailed Records display provides detailed response time statistics for transactions **related to specific user IDs**. The Detail Record parameters in the report definition determine when, how many, and what kind of detail records are to be generated. Detailed records can be viewed online using the Detailed Records display.

### Transaction Summary Display

The Transaction Summary display provides both detailed and summary response time statistics **related to specific transaction names**. The detailed statistics are specified for a particular transaction name and Natural application (library); the summary statistics are specified for a particular transaction name, regardless of the Natural application.

Transaction Summary reports are produced when the Transaction Summary parameter is set in the report definition; the report results are available online using the Transaction Summary display.

### Graphic Display

Reports may be viewed as tables or graphs. Both vertical and horizontal graphic displays are available. The interval, in seconds, for which graphs are generated is set using the Graph parameter in the report definition.

## What Reports are Supplied with Natural Monitor?

Natural Monitor supplies two reports which can be used without modification or can be customized to meet the requirements defined for your site:

- The HIGHEST RESPONSE report lists the transactions that have the highest response times, up to the maximum number of records allowed for the report (default = 50). This report allows the user to identify the transactions with the slowest response time of all monitored transactions.
- The SYSTEM RESPONSE TIME report lists the most recent transactions that exceed the response time threshold set for this report (default = 3.5 seconds).

The supplied reports can be viewed online in table or graphic form.

### How are Reports Listed?

Three types of lists are used to manage reports:

- **Report definition lists** of report definitions and started reports.
- **Started report lists** of all reports that have been started and may be accumulating data.
- **History report lists** of all reports containing historical data.

### How are Reports Named?

A report name may be up to 32 alphanumeric characters in length. It may contain blanks and any special characters **except** the following:

(')	Apostrophe or single quote
(¢)	Cent sign
(:)	Colon
(,)	Comma
(\$)	Dollar sign
(=)	Equal sign
(%)	Percent sign
(.)	Period
(/)	Slash

## Accessing the Response Time Subsystem

You can access the Natural Monitor Response Time subsystem in two ways.

 **To access the Response Time subsystem**

- From any screen **outside** the Natural Monitor System, type the code NM RT on the command line and press Enter; or
- From any screen **within** the Natural Monitor System, type RT on the command line and press Enter.

The Response Time Subsystem menu appears as shown below:

```

10:13:23                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Response Time Subsystem -

                        Code Description

                        ER  Edit Report Definition
                        LH  List History Reports
                        LR  List Report Definitions
                        LS  List Started Reports

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help           Exit                                           Canc
    
```

The functions available from this menu are described in the following table:

Code	Function	Description
<b>ER</b>	Edit Report Definitions	Allows you to specify the parameters used to collect information for a response time report.
<b>LH</b>	List History Reports	Lists the historical snapshots which contain previously accumulated data.
<b>LR</b>	List Report Definitions	Lists the report definitions and started reports currently available. A report definition is created or modified with the ER function.
<b>LS</b>	List Started Reports	Lists the reports that are currently accumulating data.

**▶ To display a list of available commands**

- From a list screen, enter a "?" in the selection column preceding a particular report name and press Enter.

A window appears containing a list of available commands.

**▶ To invoke a command from the list**

- Enter the desired function code in the data entry field and pressing Enter.

See Function Codes and Commands for a description of all function codes, PF keys, and commands available within Natural Monitor.

## Accessing the Edit Report Definition Screen

There are three ways to access the Edit Report Definition screen.

**▶ To access the Edit Report Definition screen**

- Type ER on the command line and press Enter; or
- Type the following string on the command line and press Enter:

ER *reportname*

*reportname* is either the name of an existing report definition or the name for a new report definition; or

- Type ER in the Sel column preceding the name of a report on the list of report definitions and press Enter.

See How are Reports Named for information about naming reports.

In all three cases, the Edit Report Definition screen appears as shown below:

```

10:14:22          ***** REVIEW NM UTILITY *****          2000-08-08
                  - Edit Report Definition -

          Report Name .. SAMPLE REPORT_____

Graph Parameter          Report Options
  Response Time Interval ... 0.5_          Auto Start (Y/N) ..... N
                                          History Interval (min) .... 5__
                                          History Refresh (Y/N) ..... Y

Detail Record Parameters
  Response Time Threshold .. 3.5_
  Number of Records ..... 20__
  Wrapping Options ..... NONE
      (None/Std/High)

Transaction Summary Parameter          Processing Rules
  Summary Option ..... NONE          Field Value
      (None/Sum/Det)                TP Userid ..... _____
                                          Transaction Id ..... _____
                                          NATURAL Application .. _____
                                          NATURAL Program ..... _____

REV00125 - Report definition has been saved
Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help      Exit      Save Start      Canc
    
```

If the report name is blank, or if the report name you have entered is new to Natural Monitor, the following message is displayed on the Edit Report Definition screen:

```
REV00275 - NEW REPORT DEFINITION
```

If this message does not appear, Natural Monitor has recognized the report name you entered as an existing report. Any changes you make on the Edit Report Definition screen will modify the existing report.

You may change the report name from the Edit Report Definition screen by overtyping the name in the Report Name field with a new name and pressing Enter.

The following PF keys are provided to help process report definitions:

PF Key	Command	Description
PF5	Save	Save the current report definition.
PF6	ST	Save the report defined on the screen and start it.

## Modifying Report Parameters

When you access the Edit Report Definition screen, parameter values are already entered for the report:

- If you accessed an **existing** report definition, the parameter values reflect the current definition for that report.
- If you are creating a **new** report definition, the values represent the default values set in P-NMCONF by your Natural Monitor system administrator.

You may change the parameter values on the Edit Report Definition screen, and you may add, modify, or delete processing rules for the report definition.

The parameters shown on the Edit Report Definition screen are described in the following sections.

### Graph Parameter

The following field contains one of the parameters used to graph reports:

Parameter	Description
Response Time Interval	Specifies the reporting interval, in seconds, used to graph a report horizontally and vertically. Valid values are 0.1 to 99.9.

### Detail Records Parameters

The following fields contain values which specify when and if detailed records are to be generated for a report:

Parameter	Description
Response Time Threshold	Specifies the transaction response time value, in seconds, above which Natural Monitor creates detailed records for the Detailed Records table. This value is also used to control the color and noncolor attributes of the vertical and horizontal graphs. Response times that exceed the Response Time Threshold are the highest response times experienced. Valid values are 0 to 99.9.
Number of Records	Indicates the <b>maximum</b> number of detailed response time records to be retained. Valid values are 0 to 9999.
Wrapping Options	Specifies the wrap option and has the following possible values: <ul style="list-style-type: none"> <li>NONE Detailed response time records are retained to the limit specified by the Number of Records value.</li> <li>STD (standard) The most current response time records are retained once the Number of Records value is reached.</li> <li>HIGH The response time records with the highest value are retained once the Number of Records value is reached.</li> </ul>

### Transaction Summary Parameter

The following field is used to set the summary option:

<b>Parameter</b>	<b>Description</b>
Summary Option	Specifies whether a Transaction Summary table is to be generated and, if so, what kind. Valid values are:  NONE None created.  SUM A transaction summary is created for the root transaction program; for example N222 for Natural.  DET A detailed transaction summary is created that includes Natural application information.

**Report Options**

The following fields control whether a report is to be autostarted, the interval at which historical data is to be written to the Natural Monitor repository file, and whether the report data collection is to be refreshed after this data has been written:

<b>Parameter</b>	<b>Description</b>
Autostart	Indicates whether this report is to be started automatically when Natural Monitor initializes. Valid values are Y (yes) or N (no).
History Interval	Specifies the interval, in minutes, at which the Natural Monitor history task writes historical data to the Natural Monitor repository file. Valid values are 0 to 999. <b>Note:</b> If this value is left at 0, <b>no</b> history report data will be saved.
History Refresh	Indicates whether the response time report should be refreshed (restarted) when the history interval has expired if it is a history response time report. Valid values are Y (yes) or N (no).

**Note:**

The Report Options are processed by the Natural Monitor History subsystem. This subsystem must be installed for these options to take effect.

**Controlling Color and Monochrome Attributes**

The Response Time Interval and Response Time Threshold parameters are used to control the color and monochrome attributes of response time graphs that display totals. Response times which exceed the Response Time Threshold are shown on color graphs in red and on monochrome graphs as asterisks (\*).

**Adding, Modifying, or Deleting Processing Rules**

Also shown on the Edit Report Definition screen are several fields which control processing rules within Natural Monitor.

**Processing rules** are used to restrict the accumulation of response time data to specific TP users, programs, Natural applications, or Natural programs, or to a specific set of these values.

When entering data, alphanumeric and numeric values are permitted; hexadecimal values are **not** permitted.

Each field may contain one of the following processing rules:

Field Input	Processing Rule
<b>Blank</b>	If a field remains blank, all data pertaining to that field is generated.
<b>Single value</b>	If a single value is entered in a field, data accumulation is restricted to the value entered.
<b>Wild card</b>	If a wild card is entered in a field, data accumulation is restricted by the value entered in that field. Example: P* generates data related to all and only those Natural programs that have names beginning with the value P.

## Saving a Report Definition

When you have made all necessary changes on the Edit Report Definition screen, you can save the report definition two ways.

### To save the report definition

- Press PF5 (Save); or
- Enter SAVE on the command line and press Enter.

A new report definition does not become active until you **start** it. If you change parameters for an existing report, the new parameter settings do not become active until the report is **refreshed**.

## Starting or Restarting (Refreshing) a Report

A report does not begin accumulating data until it is started. Once a report is started, tables and graphs of response time data are generated based on the parameters in the report definition.

New reports are **started**; started reports that have been modified and saved are **refreshed**. A report can be refreshed as often as necessary.

The following commands may be used to start or refresh a report:

**ST reportname** to START a new report;

**RF reportname** to REFRESH a modified, started report.

If you attempt to start a report that has already been started, the following message appears:

```
The report listed below is already started. Do you want to REFRESH it?
```

Type Y at the cursor and press Enter to REFRESH the report; type N and press Enter to retain the started report without any of its current modifications.

## Starting a Report

A report is started by issuing a start (ST) command. The ST command is issued for an existing report definition that you select. How you start a report depends on your location.

### To start a report

- From any screen within Natural Monitor, type the following string on the command line and press Enter:

```
RT ST reportname
```

- From any screen within the Response Time subsystem, type the following string on the command line and press Enter:

```
ST reportname
```

- From the list of report definitions, type ST on the selection line preceding the name of the report to be started and press Enter.

**Note:**

On the list of report definitions, a started report is identified by a ">" preceding the report name.

After you have saved a report definition, you may start a report directly from the Edit Report Definition screen.

 **To start a report directly**

- Press PF6 (Start); or
- Type ST on the command line and press Enter.

Once a report is started, the following message appears:

```
REV00092 - REPORT HAS BEEN STARTED
```

Natural Monitor then begins to accumulate data based on the parameters in the report definition that you chose.

Other than the ST command, the START command starts the Natural Monitor history session.

## Refreshing a Report

 **To restart a report**

- Enter the REFRESH (RF) command.

The REFRESH command is issued for the started report you select. When you refresh a report, all tables and graphs for the report are deleted, and new data is generated based on the current parameters in the report definition. There are three ways to perform a refresh.

 **To refresh a report**

- From any screen within Natural Monitor, type the following string on the command line and press Enter:

```
RT RF reportname
```

- From any screen within the Response Time subsystem, type the following string on the command line and press Enter:

```
RF reportname
```

- From the list of started reports or the list of report definitions, type RF on the selection line preceding the name of the report to be refreshed and press Enter.

On the list of report definitions, a started report is identified by a ">" preceding the report name. If you issue the RF command for a report that is **not** started, Natural Monitor automatically starts the report.

Once a report is refreshed, Natural Monitor begins to accumulate new data based on the parameters in the report definition that you chose.

## Listing Reports

Three different lists of report names are available from the Response Time Subsystem menu:

- Report definitions
- Started reports
- History reports

In addition, a list of historical snapshots is available for any report listed on the History Reports screen.

The following screen-positioning PF keys and commands are available from the report lists:

PF Key	Command	Description
PF7	-	Scroll backward one screen (on list of report definitions only).
PF8	+	Scroll forward one screen.
	TOP	Go to the top of the display.

**Note:**

There is no PF key available for the TOP command.

## Listing Report Definitions

The List Report Definitions function (LR) lists the names of the response time report definitions. There are two ways to access the screen.



**To access the List Report Definitions screen**

- From any screen within REVIEW NM, type RT LR on the command line and press Enter.
- From any screen within the Response Time subsystem, type LR on the command line and press Enter.

The List Report Definitions screen appears as shown in the example below:

```

10:15:57                ***** REVIEW NM UTILITY *****                2000-08-08
                        - List Report Definitions -

Sel  Report Name                Auto Int  HInt Rf Thresh Recs Wrap Tran
___ > HIGHEST RESPONSE          Y  0.5   60 Y  3.5   50 HIGH NONE
___ > SAMPLE REPORT              N  0.5    5 Y  3.5   20 NONE NONE
___  SPECIAL REPORT              N  0.5    2 Y  3.5   20 NONE NONE
___ > SYSTEM RESPONSE TIME      Y  0.5   60 Y  3.5   50 STD  SUM

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help      Exit                -      +                                Menu
  
```

Started reports are indicated by a ">" preceding the name of the report. The Sel column provides a command input field for each report name.

Reports are listed in alphabetical order by name. The remaining columns on the screen indicate the values of the report definition parameters for this report. The fields shown on this screen correspond to the parameters on the Edit Report Definition screen as follows:

Field	Description
Auto	Autostart option. Valid values are:  Y Response time report is autostarted. N Response time report is not autostarted.
Int.	Response time interval. Valid values are 0.1 to 99.9 seconds.
HInt	History interval (in minutes) where 0 indicates that the report is <b>not</b> a history report.
Rf	History refresh indicator. Valid values are:  Y Response time report is to be refreshed after historical data is written if the report is a history report. N Response time report is not to be refreshed.
Thresh	Response time threshold (in seconds).
Recs	Number of detailed records (maximum) to be retained.
Wrap	Wrapping option retention indicator. Valid values are:  NONE The report stops at the number of records defined. STD The most current records are kept if the number of records exceeds the number of records defined. HIGH The records with the highest response times are retained if the number of records exceeds the number of records defined.
Tran	Transaction summary option indicator. Valid values are:  NONE No Transaction Summary report is created. SUM A Transaction Summary report is created for the root program. DET A Transaction Summary report is created that includes Natural application information.

See Modifying Report Parameters for a description of these parameters.

For any report listed on the List Report Definitions screen, type in one of the following commands in the Sel column and press Enter to perform the associated task:

Command	Task
CL	Close started report.
ER	Edit the report definition.
EX	Display a list of historical snapshots for the report.
PH	Purge history reports.
PR	Purge the report definition.
PS	Purge the started report.
RF	Refresh (restart) the started report.
ST	Start a report.
VD	Display detailed records for the report.
VH	Display a horizontal graph for the report.
VT	Display a transaction summary for the report.
VW	Display a vertical graph for the report.

▶ **To view details of a historical report**

- Type EX on the selection line preceding the report listed.

An expanded list of historical snapshots (i.e., pictures of data stored at previous times for the report) is displayed.

## Listing Started Reports

The List Started Reports function lists the name of response time reports that have been started and are currently accumulating data. There are two ways to access the screen:

▶ **To access the List Started Reports screen**

- From any screen within Natural Monitor, type RT LS on the command line and press Enter.
- From any screen within the Response Time subsystem, type LS on the command line and press Enter.

The List Started Reports screen appears as shown in the example below:

```

10:15:57                ***** REVIEW NM UTILITY *****                2000-08-08
                        - List Started Reports -

Sel  Report Name                Auto Int. HInt Rf Thresh Recs Wrap Tran
___  HIGHEST RESPONSE            Y   0.5  60  Y   3.5    0 HIGH NONE
___  SAMPLE REPORT              N   0.5   5  Y   3.5    0 NONE NONE
___  SYSTEM RESPONSE TIME       Y   0.5  60  Y   3.5    0 STD  SUM

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help           Exit                               +                               Menu
    
```

The Sel column provides a command input field for each report name.

Reports are listed in alphabetical order by name. The remaining columns on the screen indicate the values of the report definition parameters for this report. The fields displayed on this screen correspond to the parameters on the Edit Report Definition screen as follows:

Field	Description
Auto	Autostart option indicator. Valid values are:  Y Response time report is autostarted. N Response time report is not autostarted.
Int.	Response time interval. Valid values are 0.1 to 99.9 seconds.
HInt	History interval (in minutes) where 0 indicates that the report is <b>not</b> a history report.
Rf	History refresh indicator. Valid values are:  Y Response time report is to be refreshed after historical data is written if the report is a history report. N Response time report is not to be refreshed.
Thresh	Response time threshold (in seconds).
Recs	Number of detailed records currently retained.
Wrap	Wrapping option retention indicator. Valid values are:  NONE The report stops at the number of records defined.  STD The most current records are kept if the number of records exceeds the number of records defined.  HIGH The records with the highest response times are retained if the number of records exceeds the number of records defined.
Tran	Transaction summary option indicator. Valid values are:  NONE No Transaction Summary report is created. SUM A Transaction Summary report is created for the root program. DET A Transaction Summary report is created that includes Natural application information.

See Modifying Report Parameters for a description of these parameters.

For any report listed on the Started Reports screen, type in one of the following commands in the Sel column and press Enter to perform the associated task:

Command	Task
CL	Close started report.
ER	Edit the report definition.
EX	Display a list of historical snapshots for the report.
PH	Purge history reports.
PR	Purge the report definition.
PS	Purge the started report.
RF	Refresh (restart) the started report.
ST	Start a report.
VD	Display detailed records for the report.
VH	Display a horizontal graph for the report.
VT	Display a transaction summary for the report.
VW	Display a vertical graph for the report.

If you issue the ST command from the List Started Reports screen, Natural Monitor asks whether you want to refresh (restart) the report.

▶ **To view details of a historical report**

- Type EX on the selection line preceding the report listed.

An expanded list of historical snapshots (i.e., pictures of data stored at previous times for the report) is displayed.

## Listing Historical Reports

The List History Reports function provides a summary list of historical response time reports. There are two ways to access the screen.

▶ **To access the List History Reports screen**

- From any screen within Natural Monitor, type RT LH on the command line and press Enter.
- From any screen within the Response Time subsystem, type LH on the command line and press Enter.

The List History Reports screen appears as shown below:

```

10:16:30                ***** REVIEW NM UTILITY *****                2000-08-08
                        - List History Reports -

Sel Report Name          Number  Records      Date Range
___ HIGHEST RESPONSE          1       3  1998/11/05 - 1998/11/05
___ SPECIAL REPORT           117     302  1998/11/05 - 1998/11/05
___ SYSTEM RESPONSE TIME      30     255  1998/11/05 - 1998/11/03

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help      Exit      +      Menu

```

The Sel column provides a command input field for each report name. Reports are listed in alphabetical order by name.

The remaining fields shown on this report are as follows:

Field	Description
Number	Total number of historical snapshots available for each report.
Records	Total number of records saved for all historical snapshots.
Date Range	Range of dates for which historical snapshots are available. Format of date is YYYY/MM/DD.

#### To view details pertaining to any of these reports

- Type EX on the selection line preceding the report listed.

An expanded list of historical snapshots (i.e., pictures of data stored at previous times for the report) is displayed.

#### **Note:**

When entered on the command line, the EX command accesses the List History Reports screen as shown above.

#### To purge all historical reports of a report destination

- Type PH on the selection line preceding the history report listed.

## Listing Historical Snapshots

There are three ways to access the Expanded List of historical snapshots for a response time report listed on the List History Reports screen.

#### To access the Expanded List of historical snapshots

- From any screen within Natural Monitor, type the following string on the command line and press Enter:

RT EX *reportname*

- From any non-list display within the Response Time subsystem, type EX *reportname* on the command line and press Enter.
- From the List History Reports screen, type EX in the Sel column next to a report name and press Enter.

An Expanded List for the history report selected appears as shown in the example below:

```

10:17:10          ***** REVIEW NM UTILITY *****          2000/08/08
                - Expanded List for SPECIAL REPORT -

  Date/Time Recs   Date/Time Recs   Date/Time Recs   Date/Time Recs
  2000/08/08      ___ 10:47:00    2   ___ 14:28:00    11  ___ 14:07:00    8
  ___ -Current-    2000/08/08      ___ 14:27:00    14  ___ 14:03:00    13
  ___ 10:16:00    15  ___ 14:43:00    3   ___ 14:26:00    25  ___ 14:02:00    18
  2000/08/01      ___ 14:41:00    12  ___ 14:25:00    16  ___ 14:01:00    16
  ___ 15:00:00     9   ___ 14:40:00    16  ___ 14:24:00     6   ___ 14:00:00    15
  ___ 14:59:00     5   ___ 14:39:00    11  ___ 14:23:00    15  ___ 13:59:00     4
  ___ 14:58:00    18  ___ 14:38:00    13  ___ 14:22:00    13  ___ 13:58:00    12
  ___ 11:03:00     6   ___ 14:37:00    15  ___ 14:21:00     2   ___ 13:57:00    17
  ___ 10:57:00     5   ___ 14:36:00    12  ___ 14:20:00    12  ___ 13:55:00     5
  ___ 10:55:00     8   ___ 14:35:00    13  ___ 14:19:00     8   ___ 13:54:00     6
  ___ 10:54:00     2   ___ 14:34:00     9   ___ 14:18:00     5   ___ 13:53:00    16
  ___ 10:53:00    14  ___ 14:33:00    14  ___ 14:17:00    10  ___ 13:52:00     7
  ___ 10:51:00     9   ___ 14:32:00     7   ___ 14:16:00     2   ___ 13:51:00     8
  ___ 10:50:00    13  ___ 14:31:00     3   ___ 14:11:00     2   ___ 13:50:00     4
  ___ 10:49:00     7   ___ 14:30:00    21  ___ 14:10:00    10  ___ 13:48:00     9
  ___ 10:48:00     9   ___ 14:29:00    16  ___ 14:08:00    20  ___ 13:47:00    11

REV00055 - Select a historical snapshot
Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help      Exit      --      +      Menu
    
```

The Sel column provides a command input field for each historical snapshot listed. Each historical snapshot is identified on this expanded list by date and time. Current data is marked as "-Current-" on the list.

The Recs column indicates the number of records written. Possible values are:

- 0 No transaction, no detail records.
- 1 Transactions, no detail records.
- >1 Transactions and detail records.

**Note:**

When there are no transactions, detail records do not exist.

When "Logging of empty records" is set to NO, reports without transaction will not be written by the history session.

The following message appears on the screen:

```
REV00055 - SELECT A HISTORICAL SNAPSHOT
```

For any snapshot listed on the Expanded List screen, type in one of the following commands in the Sel column and press Enter to perform the associated task:

Command	Task
PH	Purge this historical snapshot.
PX	Purge marked range - start.
PY	Purge marked range - end.
VD	Display a detailed records table for the snapshot.
VH	Display a horizontal graph for the snapshot.
VW	Display a vertical graph for the snapshot.

**Note:**

The VT command is **not** available when viewing historical snapshots.

Once you have accessed either the Expanded List or the actual historical display, you may toggle back and forth between the displays by pressing PF2.

### Viewing Earlier or Later Historical Snapshots

Using the PREV or NEXT command, you may access earlier or later historical snapshots.

#### To access earlier historical snapshots

- Type the command PREV on the command line of any historical snapshot screen and press Enter.

#### To view later historical snapshots

- Type the command NEXT on the command line and press Enter.

## Accessing Natural Monitor Tables

The following tables may be generated for any response time report in Natural Monitor:

Command	Description
VD	Detailed Records table.
VT	Transaction Summary table.

Each table consists of one or more screens of data. The data generated from each of these tables is derived from the parameters entered in the report definition (Edit Report Definition screen).

The **Detailed Records table** provides response time statistics for individual transactions for individual users. A Detailed Records display is generated for a report only if the Detail Record parameters were entered on the Edit Report Definition screen for a report definition.

The **Transaction Summary table** provides response time statistics for transactions executed in Natural. A Transaction Summary display is generated for a report only if the Transaction Summary parameter of SUM or DET was entered on the Edit Report Definition screen for that report definition.

**Note:**

Both current and historical data are available for the Detailed Records table. Historical data is **not** available for the Transaction Summary table.

## Accessing the Detailed Records Table

There are five ways to access the Detailed Records screen.

**▶ To access the Detailed Records Table**

- From any screen within Natural Monitor, type the following string on the command line and press Enter:

```
RT VD reportname
```

- From within the Response Time subsystem, type the following string on the command line and press Enter:

```
VD reportname
```

- From any non-list display within the Response Time subsystem, type VD on the command line and press Enter. The last accessed report will be displayed.
- From the list of Report Definitions or the list of Started Reports, type VD in the Sel column next to a started report and press Enter.
- From the Expanded List for a history report, type VD in the Sel column next to a historical snapshot and press Enter.

The Detailed Records screen for a particular report appears as shown in the example below:

```

10:21:03                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Detailed Records for SPECIAL REPORT -
                        - from 1998/03/16 16:23:41 -

TP      Response Natural  Trans   Natural  Natural  _____Total Database_____
Userid   Time Userid  Name    Appl    Program  Calls  ElpTime  CmdTime
GGS      0.731 GGS     NC22    SYSREVM P-NMRTLH  394   0.388   0.08494
GGS      0.125 GGS     NC22    SYSREVM P-NMRTEX  61    0.044   0.00819
GGS      0.111 GGS     NC22    SYSREVM P-NMRTEX  62    0.040   0.01051

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help  Hist  Exit                -      +      Pick          ==>  Menu
    
```

This display is sorted in descending numeric order by Trans End Time (transaction completion time) if the WRAP option parameter value entered for the related report definition is NONE or STD. If the WRAP option parameter value is HIGH, the display is sorted in descending numeric order by Response Time.

A row of statistics three screens wide is presented in this display for each user ID in the list. Use one of the following commands or PF keys to access these additional screens or to display information for one particular user ID:

PF Key	Command	Description
PF2	HIST/CURR	Toggle between the historical display and the current display.
PF7	-	Scroll backward one screen (on list of report definitions only).
PF8	+	Scroll forward one screen.
PF9		Select (pick) a particular detail record.
PF10	LEFT	Scroll the display left one screen.
PF11	RIGHT	Scroll the display right one screen.
	TOP	Go to the top of the display.

**Note:**

There is **no** PF key available for the TOP command.

The PICK command **cannot** be used from the command line for these displays.

From each Detailed Records screen, two screens are accessible which show the remaining columns of the Detail Records table.

 **To display the remaining columns of the Detail Records table**

- Press PF11 to access the first screen.

```

10:21:43          ***** REVIEW NM UTILITY *****          2000-08-08
                - Detailed Records for SPECIAL REPORT -
                - from 1998/03/16 16:25:00 -

TP      Response _Avg Database_          High/Last_____
Userid   Time ElpTime CmdTime Cmd DBID  FNR Stmt Lvl Calls ElpTime  CmdTime
GGS      0.731  0.000 0.00020 L9   10   73 2130 1   394   0.010  0.00968
GGS      0.125  0.000 0.00012 L9   10   73 7090 1    61   0.002  0.00040
GGS      0.111  0.000 0.00016 L9   10   73 7090 1    61   0.003  0.00200

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help Hist Exit          -      +      Pick <=== ==> Menu
    
```

- Press PF11 to access the second screen:

```

10:21:53                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Detailed Records for SPECIAL REPORT -
                        - from 1998/03/16 16:25:00 -

TP      Response      Trans NAT  Trans      Terminal
Userid   Time      Number Thd  End Time  Name
GGS      0.731      1771   2   16:23:51  0824
GGS      0.125      1773   2   16:23:58  0824
GGS      0.111      1772   2   16:23:57  0824

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help Hist Exit                -      +      Pick <===      Menu
    
```

- Press PF10 to return to the first screen.

**Statistical Fields on the Natural Monitor Detailed Records Table**

The fields available on the four Detailed Records screens are described in the following table:

Field	Description
TP Userid	The CICS user ID for the transaction. Corresponds to system variable *INIT-USER.
Response Time	The transaction response time, measured between terminal input and output.
Natural Userid	The Natural user ID for the transaction. Corresponds to system variable *USER.
Trans Name	The CICS transaction ID.
Natural Appl	The Natural application for the transaction. Corresponds to system variable *LIBRARY-ID.
Natural Program	The Natural program within the transaction, that had the highest database command time or in case of no database calls, the last program executed for the transaction.
Total Database Calls	The number of database calls executed during the transaction.
Total Database ElpTime	The total amount of time required for database communications. This time includes database duration, cross address space time and CICS system queue time.
Total Database CmdTime	The amount of time which expired between the time the command was received by the database system and the time the result was passed back the database system.
Avg Database ElpTime	The average elapsed time for all database calls during the transaction.
Avg Database CmdTime	The average database command time for all database calls during the transaction.
High/Last Cmd	The database command issued for the Natural program that had the highest command time or the last database command issued during the transaction.
High/Last DBID	The database ID accessed by the database call issued by the Natural program that had the highest command time or the last database ID accessed during the transaction.
High/Last FNR	The database file number accessed by the database call issued by the Natural program that had the highest command time or the last database file number accessed during the transaction.
High/Last Stmt	The Natural program statement that issued the database call that had the highest command time within the transaction.
High/Last Lvl	The Natural call level of the program that issued the database call that had the highest command time or the call level of the last program executed by the transaction.
High/Last Calls	The total number of database calls issued by the Natural program that had the highest database command time.
High/Last ElpTime	The elapsed time required to process the database call issued by the Natural program transaction that had the highest database command time.
High/Last CmdTime	The command time required by the database to process the call that had the highest database command time.
Trans Number	The CICS transaction number.
NAT Thd	The Natural storage thread number for the transaction. 0 indicates that a getmained storage thread or no thread was used.
Trans End Time	The time, in HH:MM:SS format, that the transaction was ended.
Terminal Name	The CICS terminal name. Corresponds to system variable *INIT-ID.

### Accessing the Summary of Fields Window

You can access a single screen summary of all fields in the Detailed Records display for a particular transaction number for a particular user from any of the Detailed Records screens.

**▶ To access a single screen summary of all fields in the Detailed Records display**

- Position the cursor on the row that provides information for that transaction and user ID and press PF9 (Pick).

**Note:**

The PICK command **cannot** be used from the command line in this instance.

The Summary of Fields window appears as shown in the example below:

```

10:21:53                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Detailed Records for SPECIAL REPORT -

                        - Detail Record -

TP System Information          Database Information
  Userid ..... GGS           Total Calls ..... 62
  Response Time ..... 0.130   Elapsed Time ..... 0.056
  Transaction Name ..... NC22  Avg Elapsed Time ... 0.000
  Transaction Number .... 1811  Command Time ..... 0.01121
  Terminal Name ..... 0824     Avg Command Time ... 0.00017
  Transaction End Time .. 16:30:09

Natural Information          High/Last Database Info
  Userid ..... GGS           Calls ..... 61
  Application ..... SYSREVN   Elapsed Time ..... 0.006
  Program ..... P-NMRTEX      Command Time ..... 0.00059
  Statement ..... 7090        Command ..... L9
  Call Level ..... 1          Database Id ..... 10
  Thread Number ..... 2       File Number ..... 73

Command ==>
Enter-PF1---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12----
      Help  Exit                                          Menu
    
```

The fields displayed on this screen are the same as those shown on the Detailed Records screen described above.

### Accessing Historical Data for Detailed Records

There are two ways to display the Expanded List of historical snapshots available for the Detailed Records display.

**▶ To display the Expanded List of historical snapshots**

- Type EX on the command line of the current detail records display and press Enter, or
- Type EX in the Sel column in one of the three list report screens and press Enter.

**▶ To display a particular historical snapshot from the Expanded List**

- Type VD in the Sel column preceding the snapshot you want to display and press Enter.

Once you have accessed a historical display, you may toggle back and forth between this historical display and the current display by pressing PF2.

## Accessing the Transaction Summary Table

There are four ways to access the screen.

### ▶ To access the Transaction Summary screen

- From any screen within Natural Monitor, type the following string on the command line and press Enter:  
RT VT reportname
- From within the Response Time subsystem, type the following string on the command line and press Enter:  
VT reportname
- From any non-list display within the Response Time subsystem, type VT on the command line and press Enter. The last accessed report will be displayed.
- From the list of Report Definitions or the list of Started Reports, type VT in the Sel column next to a started report and press Enter.

The Transaction Summary screen for a particular report appears as shown in the example below:

```

10:25:03                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Transaction Summary for SPECIAL REPORT -

Trans   Natural   Avg   Total   ___Total Database___   ___Average Database___
Name    Appl      Resp  Trans   Calls ElpTime CmdTime  Calls ElpTime CmdTime
NC22   **SUM**  0.060   11     78  0.249  0.031  7.09  0.003  0.0004

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help      Exit      Det    Sum      +              Menu

```

The sample screen above is a summary version indicating that the Transaction Summary parameter in the related report definition is set to the value SUM.

Each summary table is marked with "\*\*\*SUM\*\*" in the Natural Appl field.

If it is set to the value DET, the default report would be the detailed version of the Transaction Summary table.

The detailed version includes the Natural application (Natural Appl) for each root transaction program (Trans Name).

The Transaction Summary table is sorted in alphabetic order based on the transaction name. If a detailed version of the table is accessed, a secondary sort is performed by Natural application.

The following are the additional PF keys and commands available on this screen:

PF Key	Command	Description
PF5	DET	Access the detailed version of the Transaction Summary table. The first line shown is a summary of all detailed transactions listed.  <b>Note:</b> This table shows information on Natural application usage.
PF6	SUM	Access the summary version of the Transaction Summary table.  <b>Note:</b> This table does <b>not</b> show information on Natural application usage.
PF8	+	Scroll forward one screen.
	TOP	Go to the top of the display.

**Note:**

There is no PF key available for the TOP command.

You may use PF5 (Det) and PF6 (Sum) to toggle back and forth between the detailed and summary versions of the Transaction Summary table.

### Statistical Fields on the Transaction Summary Table

The fields available on the Transaction Summary screen are:

Field	Description
Trans Name	The CICS transaction ID.
Natural Appl	The Natural application name (detail only). <b>**SUM**</b> indicates a summary line for the transaction name including all applications.
Avg Resp	The average response time in seconds for the transaction/application name.
Total Trans	The total number of transactions for the transaction/application name.
Total Database Calls	The total number of database calls issued by the transaction/application name.
Total Database ElpTime	The total amount of time in seconds for all database calls issued by the transaction/application name.
Total Database CmdTime	The total amount of time (seconds) required by the database to process all database calls issued by the transaction/application name.
Average Database Calls	The average number of database calls issued for the transaction/application name.
Average Database ElpTime	The average amount of time (seconds) required to process all database calls issued by the transaction/application name.
Average Database CmdTime	The average amount of time (seconds) required by the database to process all database calls issued by the transaction/application name.

## Using Vertical and Horizontal Graphs

Response time reports are available as vertical and horizontal graphs which may be accessed from the following lists:

- Report definitions
- Started reports
- Expanded list of historical snapshots

▶ **To access a graph**

- Enter either of the following commands in the Sel column for a particular report (or historical snapshot) and pressing Enter:

Command	Description
VH	Display a horizontal graph of response time intervals.
VW	Display a vertical graph of response time intervals.

Once a default vertical or horizontal graph has been accessed, you may access similar graphs of three sets of statistics.

▶ **To display additional graphs**

- Use the commands listed below.

Command	Report Description
TRANS	Response times for transactions (default graph).
CALLS	The total number of database calls issued for transactions.
ACALL	The average number of database calls issued for transactions.

The Response Time Interval in the report definition (Edit Report Definition screen) determines the whole or fractional number of seconds used to graph the response time intervals on each graph. On the vertical graph, intervals are designated as "Response Time Intervals in Seconds." On a horizontal graph, intervals are designated as "Response Time Range".

A graph may be displayed in color or noncolor; the availability of color depends on whether you are using an extended data stream (EDS) terminal. The COLOR ON command displays a color graph; the COLOR OFF command returns to a noncolor display.

## Interpretation of Graphs that List Totals

A vertical or horizontal graph of total transactions or total calls is interpreted in terms of two parameters set in a report definition (Edit Report Definition screen): the Response Time Interval and the Response Time Threshold. The following gives the physical manifestation of that interpretation as well as describing it:

Interpretation	Color/Symbol	Description
Good Response Time	Green, "-"	Intervals or ranges that fall <b>below</b> the value set for the Response Time Interval parameter.
Warning	Yellow, "="	Intervals or ranges that fall <b>between</b> the value set for the Response Time Interval parameter and the value set for the Response Time Threshold parameter.
Poor Response Time	Red, "*"	Intervals or ranges that <b>exceed</b> the value set for the Response Time Threshold parameter.

**Note:**

The symbol shown in the table is used when the display is **not** in color.

The following are several examples of how to interpret the values on these graphs:

- For a **good response time**:  
If the Response Time Interval = 0.5, all transactions with a response time under 0.5 seconds are displayed in green or with the "-" character.
- For a **warning**:  
If the Response Time Interval = 0.5 and the Response Time Threshold = 3.5, all transactions with a response time between 0.5 and 3.5 seconds are displayed in yellow or with the character "=" when not in color.
- For a **poor response time**:  
If the Response Time Threshold = 3.5, all transactions with a response time that exceeds 3.5 seconds are displayed in red or with the character "\*".

### Interpretation of Graphs that List Averages

A vertical or horizontal graph of average calls is interpreted in terms of average number thresholds as follows:

Interpretation	Color/Symbol	Description
Good Response Time	Green, "-"	Average number of calls is less than or (Threshold 25) equal to 25.
Warning	Yellow, "="	Average number of calls is greater than (Threshold 50) 25 and is less than or equal to 50.
Poor Response Time	Red, "*"	Average number of calls is greater than (Beyond Threshold 50) 50.

**Note:**

The symbol shown in the table is used when the display is **not** in color.

The following are several examples of how to interpret the values on these graphs:

- For a **good response time** (when the threshold is 25):  
If an average of 20 database calls is listed within the interval of 1.0 to 1.5 seconds, it is displayed in green or with the "-" character.
- For a **warning** (when the threshold is 50):  
If an average of 40 database calls is listed within the interval of 1.5 to 2.0 seconds, it is displayed in yellow or with the character "=".
- For a **poor response time** (when the threshold is greater than 50):  
If an average of 70 database calls is listed within the interval of 2.5 to 3.0 seconds, it is displayed in red or with the character "\*".

### Commands Used to Control Graphs

In addition to the commands and PF keys that are generally available within the system, the following special commands and PF keys control the various types of vertical and horizontal graphs available:

See Function Codes and Commands for a description of all function codes, PF keys, and commands available within Natural Monitor.

PF Key	Command	Description
PF2	HIST/CURR	Toggles between current and historical data.
PF4	TRANS	Accesses the default graph, the total number of transactions.
PF5	CALLS	Displays the total number of database calls issued for the total number of transactions. Each database call increases the transaction response time.
PF6	ACALL	Displays the average number of database calls issued for the total number of transactions.
PF10	HORI	Toggles to a horizontal graph from a vertical graph.
PF10	VERT	Toggles to a vertical graph from a horizontal graph.
	COLOR OFF	Displays a noncolor graph.
	COLOR ON	Displays a color graph.

### Accessing a Vertical Graph

The command VW enables you to view graphs vertically. There are two ways to use it.


 **To access a vertical graph**

- From any screen within Natural Monitor, type the following string on the command line and press Enter:

```
RT VW reportname
```

- From the list of report definitions, started reports, or the expanded list of historical snapshots, type VW in the Sel column next to the selected report (or historical snapshot) and press Enter.

A default vertical graph appears similar to the one shown below:

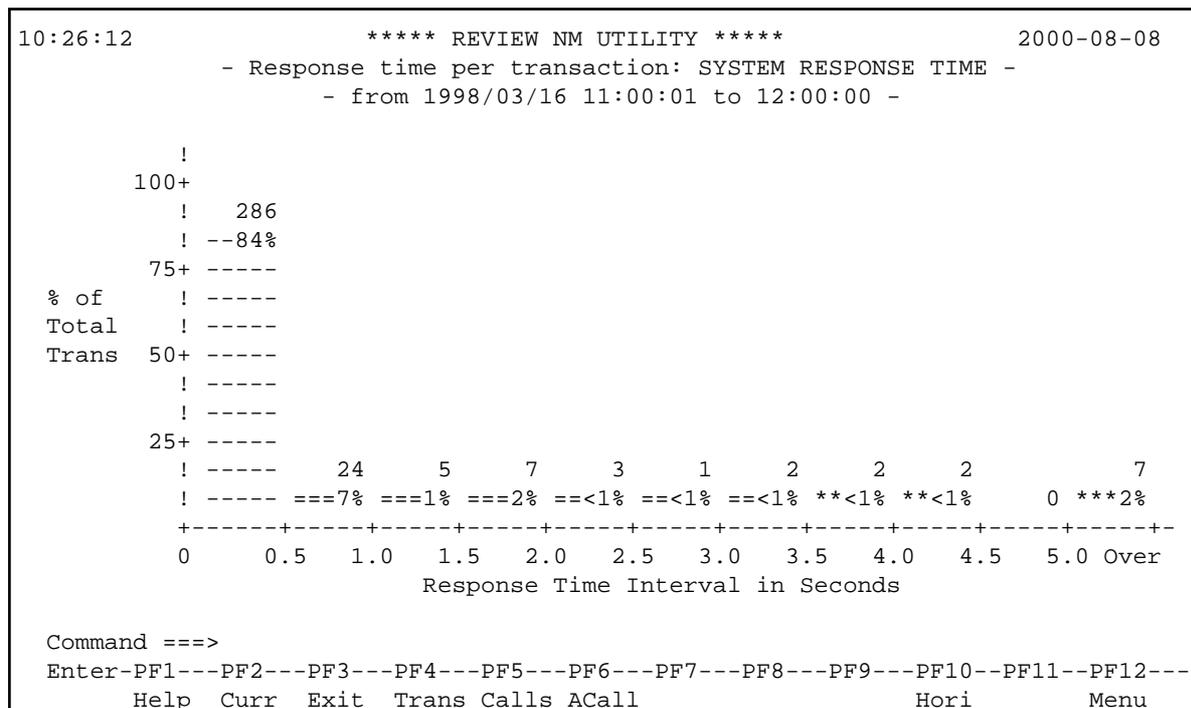

The default vertical graph illustrated above shows various response times for transactions. The following table describes the different graphs available in the vertical format:

Graph	Command/PF Key	Description
% of Total Trans	TRANS/PF4	The percentage of total transactions that a specific response time interval represents (default).
% of Total Calls	CALLS/PF5	The percentage of total calls that a specific response time interval represents.
Avg Call/Trans	ACALL/PF6	The average number of database calls issued for each transaction within a specific response time interval.

The following table describes the fields found on a vertical graph:

Field	Graph(s)	Description
Avg DB Calls/Tran	Avg Call/Trans	The average number of database calls issued for each transaction within a specific response time interval.
Response Time Interval in Seconds	Avg DB Calls/Tran % of Total Trans % of Total DB Calls	The average number of database calls issued for each transaction within a specific response time interval.
% of Total	% of Total Trans % of Total DB Calls	The percentage of the total that a specific range represents.

The following are three examples of how to interpret the values on these graphs:

- On the graph displaying the % of total transactions (see the above screen):  
84% of all transactions experienced a response time between 0 and 0.5 of one second.
- For a graph displaying the % of total DB calls:  
20% of total calls for transactions may have occurred between 0 and 0.5 of one second.
- For a graph displaying average DB calls per transaction:  
an average of 175 DB calls per transaction may have occurred between 1.5 and 2.0 seconds.


## Accessing a Horizontal Graph

The command VH enables you to view graphs horizontally. There are two ways to use it.

### To access a horizontal graph

- From any screen within Natural Monitor, type the following string on the command line and press Enter:  
`RT VH reportname`
- From the list of report definitions, started reports, or the expanded list of historical snapshots, type VH in the Sel column next to the selected report (or historical snapshot) and press Enter.

A default horizontal graph appears similar to the one shown below:

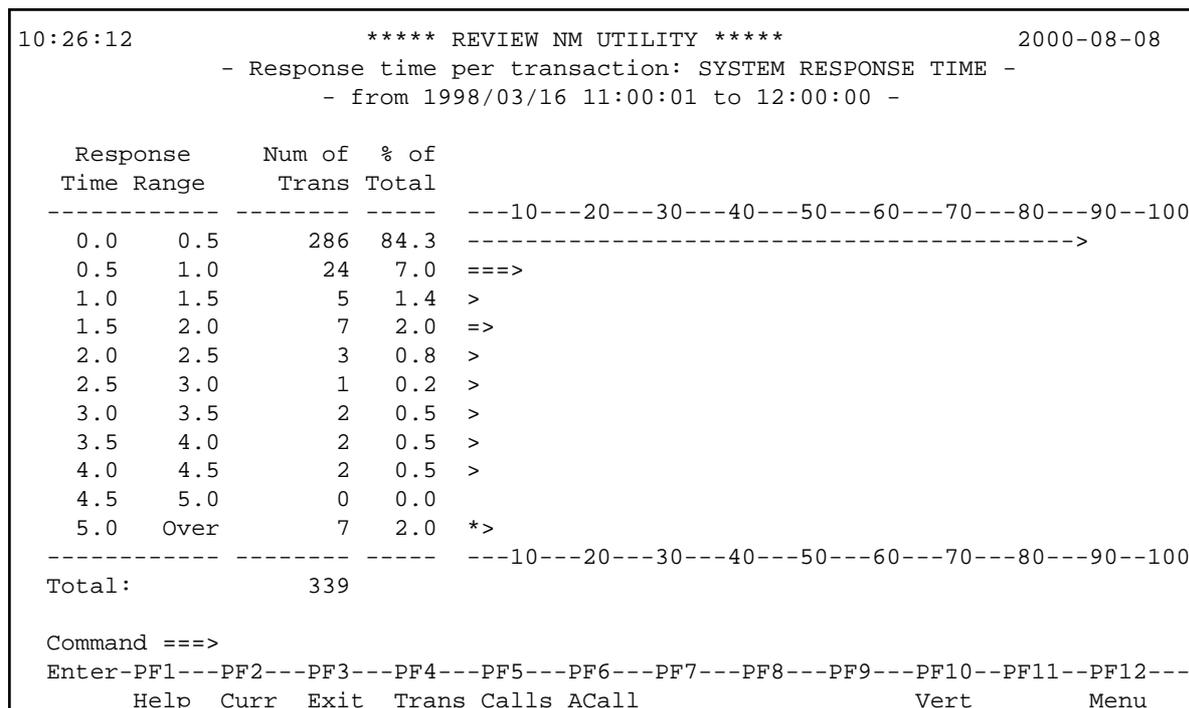

The default horizontal graph illustrated above shows various response times for transactions. The following table describes the different graphs available in the horizontal format:

Graph	Command/PF Key	Description
% of Total Trans	TRANS/PF4	The percentage of total transactions that a specific response time interval represents (default).
% of Total Calls	CALLS/PF5	The percentage of total calls that a specific response time interval represents.
Avg Call/Trans	ACALL/PF6	The average number of database calls issued for each transaction within a specific response time interval.

The following table describes the fields found on a horizontal graph:

Field	Graph(s)	Description
Avg Calls	Avg Call/Trans	The average number of database calls issued for each transaction within a specific response time interval.
Num of DB Calls	% of Total Trans % of Total Call	The total number of database calls issued for the total number of transactions within a specific response time interval.
Num of Trans	% of Total Trans	The actual number of transactions that received a response within a specific response time interval.
Response Time Range	% of Total Trans % of Total Calls Avg Call/Trans	The whole or fractional number of seconds used to graph response times. This number is derived from the Response Time Interval field in the report definition.
% of Total	% of Total Trans % of Total Calls	The percentage of the total that a specific range represents.

The following are three examples of how to interpret the values on these graphs:

- On the graph displaying the % of total transactions (see the above screen):  
84.3% of the total of 339 transactions, or 286 transactions, experienced a response time between 0 and 0.49 of one second.
- For a graph displaying the % of total calls:  
5.5% of the total of 21,930 calls, or 1,228 calls, may have experienced a response time between 1.5 and 1.99 seconds.
- For a graph displaying average calls per transaction:  
an average of 225 calls per transaction (total: 675) may have occurred between 2.0 and 2.49 seconds.

## Purging Report Definitions and Started Reports

The following commands enable you to purge your report definitions and started reports. These commands are available from the list of report definitions and the list of started reports by entering

### ▶ To purge a report definition

- Enter the command PR in the Sel column preceding the selected report and press Enter.

### ▶ To purge a started report

- Enter the command PS in the Sel column preceding the selected started report and press Enter.

In both cases, the following message appears:

```
Please confirm PURGE request for: reportname (Y or N).
```

- Verify that the correct report has been selected.
- Type Y at the cursor position and press Enter to purge the report; or type N and press Enter to retain the report.

## Purging a Started Report

When you delete a started report, you delete only the current data accumulated by the report. The related report definition is not affected and can be modified for use as another report. Historical snapshots for the report are also retained.

Before you purge a started report, remember that a started report can be refreshed (restarted) using a modified report definition. A restarted report retains historical snapshots generated using the previous report definition.

## Purging a Report Definition

It is possible to purge a report definition without purging the related started report. However, that started report cannot thereafter be modified (i.e., refreshed or restarted).

Before you purge a report definition, remember that a report definition can be modified for use with another report. You might decide to delete a report definition that has never been started and will never be started.

## Purging Historical Snapshot(s)

You may decide to purge one or more of the historical snapshots available for a particular started report. For instance, you might decide to purge the oldest historical snapshot(s). Purging a historical snapshot has no effect on the started report or its associated report definition.

▶ **To purge a historical snapshot**

- Enter the command **PH** in the Sel column preceding the selected report and press Enter.

The PH command is available from the list of historical reports, the list of report definitions, the list of started reports and the expanded list of historical snapshots. In addition, this command is available in the command line of the expanded list of historical snapshots screen.

▶ **To purge a marked range - start**

- In the expanded list of historical snapshots, enter the command **PX** in the Sel column preceding the historical snapshots and press Enter.

▶ **To purge a marked range - end**

- In the expanded list of historical snapshots, enter the command **PY** in the Sel column preceding the historical snapshots and press Enter.

If the range of historical snapshots to be purged is not complete, the following window appears:

Purge report(s)
Date/Time From _____
Date/Time To _____

The following date formats are accepted:

YYYY/MM/DD	YY/MM/DD
YYYY-MM-DD	YY-MM-DD
YYYY.MM.DD	YY.MM.DD
YYYYMMDD	YYMMDD

The following time formats are accepted:

HH:MM  
HHMM

If the range of historical snapshots to be purged is complete, the following window appears:

Please verify PURGE request for the date and time listed below: From: 1998/03/17 00:00:00 To: 1998/03/17 23:59:00  ( Y/N ) Y
---

Verify that the correct report range has been selected; then type Y at the cursor position and press Enter to purge the report(s); type N and press Enter to retain the report(s).

# Active User Information

This section covers the following topics:

- Functional Overview
  - Summary of Active Users Display
  - Lowest 20 Window
  - Highest 20 Window
  - Summary of Active User Window
  - Accessing the Natural Call Table Window
- 

## Functional Overview

The Summary of Active Users function displays the system resources used by all active users that have logged on to Natural since the initialization of CICS. An **active user** is one who is currently logged on to Natural under CICS.

The system resources used by each active user are captured in the following statistics:

- The total number of seconds that the user's task is waiting for the database;
- The amount of data sent back to the terminal;
- The average response time for the user's transactions.

The following display and windows are available within the Summary of Active Users function:

- **Summary of Active Users Display**  
Presents a list of all active users and a line of information for each user that is four screens wide.
- **Lowest 20 Window**  
Lists the 20 users who are associated with the smallest values of a system resource sort list.
- **Highest 20 Window**  
Lists the 20 users who are associated with the largest values of a system resource sort list.
- **Summary of Active User Window**  
Provides the same information as on the Summary of Active Users screen, but presents it in table form on a single screen for a single user.
- **Natural Call Table Window**  
Lists all Natural programs accessed by the user's last or current transaction as well as detailed information about the database calls issued by these Natural programs.

**Note:**

Historical data is not available for the Summary of Active Users function.

---

## Summary of Active Users Display

 **To access the Natural Monitor Summary of Active Users display**

- From any screen outside Natural Monitor, type the code NM SA on the command line and press Enter, or
- From any screen within Natural Monitor, type SA on the command line and press Enter.

The Summary of Active Users display comprises four screens, which are shown on the following pages. This is the first screen:

```

16:45:09                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Summary of Active Users -

TP      Sess  Terminal  Trans      Trans  Session  Last Trans  Last Trans
Userid  Id    Name      Name      Number  Status   Date        Time
REVHIST  1    Subtask  NC22      20     Inactive 2000-08-08  16:45:00
GGS      12   0824     NC22      1928   Active   2000-08-08  16:44:44
REC      13   0838     N         1610   Inactive 2000-08-08  15:55:36
GGS      19   0773     NC22      1926   Inactive 2000-08-08  16:45:05
REC      16   0795     NR23      1576   Terminate 2000-08-08  15:51:29

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help  STerm Exit  SUser SSid Low  High  +  Pick      ==>  Menu
    
```

This is the second screen:

```

16:45:46                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Summary of Active Users -

TP      _____ NATURAL _____ Last _____ Curr/Last
Userid  Userid  Appl   Program Stmt Lvl Thd Ver Cmd  DBID  FNR  DB  Duration
REVHIST REVHIST SYSREVM S-NMRTST 2570  2  1 2.2 RC   10   73   0.00032
GGS     GGS     SYSREVM N-NMSA10 3630  2  2 2.2 RC   10   0   0.00624
REC     REC     SYSREVM M-NMSA   0016  2  4 2.2 RC   10  45   0.00640
GGS     GGS     GGS     AHELLO   0000  0  3 2.2 RC   10   0   0.00656
REC     REC     REC     MAINMEM1 0016  2  0 2.3 RC   10  49   0.00032

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help  STerm Exit  SUser SSid Low  High  +  Pick  <=== ==>  Menu
    
```

This is the third screen:

```

16:46:10                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Summary of Active Users -

TP      Database
-----
Userid  Curr Calls      Calls Call/Tran ElpT/Call CmdT/Call
REVHIST      701         747   747.00    0.020   0.00270
GGS          0         22,227  86.82    0.003   0.00051
REC          0          263    52.60    0.009   0.00084
GGS          0          113    113.00   0.014   0.00100
REC          0           31    31.00    0.005   0.00081
KKR          0           13    13.00    0.000   0.00046

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help STerm Exit SUser SSid Low  High  +   Pick <=== ==> Menu
    
```

This is the fourth screen:

```

16:46:34                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Summary of Active Users -

TP      Avg Resp   Total   Term   Logon      Logon
Userid   Time      Trans  Data  Date      Time
REVHIST  1.999        1      0     2000-08-08 12:43:29
GGS      0.243       485   482K  2000-08-08 14:41:18
REC      0.126        33  12336 2000-08-08 15:47:34
GGS      2.267         1      0     2000-08-08 16:45:03
REC      0.211         1      0     2000-08-08 15:51:29
KKR      0.340         1      0     2000-08-08 16:45:54

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help STerm Exit SUser SSid Low  High  +   Pick <===      Menu
    
```

The following PF keys and commands are available from these screens:

PF Key	Command	Description
PF1	HELP	Invoke online help.
PF2	STERM SORTTERM	Sort users in ascending order by terminal name.
PF3	EXIT	Exit this function.
PF4	SUSER SORTUSER	Sort users in ascending order by user ID.
PF5	SSID SORSID	Sort users in ascending order by SID.
PF6	LOW	Show the lowest 20 values (or user IDs in an alphabetic sort) for the field column indicated by the cursor position.
PF7	HIGH	Show the highest 20 values (or user IDs in an alphabetic sort) for the field column indicated by the cursor position.
PF8	+	Scroll the display forward one page. <b>Note:</b> When the bottom of the list is reached, the use of the PF key or the command causes the list to wrap to the top of the list.
	TOP	Go to the top of the display.
PF9	PICK	Display all information for a user indicated by the cursor.
PF10	LEFT	Scroll the display left one screen.
PF11	RIGHT	Scroll the display right one screen.
PF12	MENU	Return to the Natural Monitor Main Menu.

**Note:**

No PF key is available for the TOP command.

## Statistical Fields on the Summary of Active Users Display

The fields available on the four Summary of Active Users screens are described in the following table:

Field	Description
TP Userid	The CICS user id for the transaction. Corresponds to system variable *INIT-USER.
Sess Id	The unique Review Natural Monitor session identification number for the Natural session.
Terminal Name	The CICS terminal name. Corresponds to system variable *INIT-ID.
Trans Name	The CICS transaction ID.
Trans Number	The CICS transaction number.

Session Status	The current status of the Natural session. The following values are possible:  Active      Session actively processing. Inactive    Terminal I/O or other wait. DB Call     Database call processing. Logon       Session initialization. Terminate   Marked for termination.
Last Trans Date	The end date of the last transaction.
Last Trans Time	The end time of the last transaction.
Natural Userid	The Natural user ID for the transaction. Corresponds to system variable *USER.
Natural Appl	The Natural application for the transaction. Corresponds to system variable *LIBRARY-ID.
Natural Program	The name of the Natural program that is currently being executed.
Natural Stmt	The statement line number within the Natural program currently being executed.
Natural Lvl	The execution level of the Natural program currently being executed.
Natural Thd	The Natural storage thread number for the transaction. 0 indicates that a getmained storage thread or no thread was used.
Natural Ver	The Natural version for the session. Possible values are: 2.2, 2.3 and 3.1.
Last Cmd	The last database command issued.
Last DBID	The last database ID accessed.
Last FNR	The last database file number accessed.
Curr/Last Duration	The duration of the current or the last database call in seconds.
Database Curr Calls	The number of database calls issued by the current or last transaction.
Database Calls	The total number of database calls that have been issued by the session.
Database Call/Tran	The average number of database calls per transaction for the session.
Database ElpT/Call	The average elapsed time per database call in seconds for the session.
Database CmdT/Cal	The average database command time for all database calls issued during the session.
Avg Resp Time	The average response time in seconds for all transactions of the session.
Total Trans	The total number of transactions that have been executed for the session.
Term Data	The number of bytes that have been written to the user's terminal screen.
Logon Date	The session start date in YYYY/MM/DD format.
Logon Time	The session start time in HH:MM:SS format.

## Additional Commands for the Summary of Active Users Function

There are several additional commands and PF keys that are available for use on the summary of all users and individual summary screens within this function. They are:

Command	PF Key	Description								
CANCEL		The specified session is terminated abnormally. A session may be cancelled by TP user ID (uuu), terminal name (ttt) or session ID (nnn), see below.  <table> <thead> <tr> <th>Format</th> <th>Example</th> </tr> </thead> <tbody> <tr> <td>CANCEL U=uuuuuuu</td> <td>CANCEL U=GGS</td> </tr> <tr> <td>CANCEL T=ttt</td> <td>CANCEL T=T031</td> </tr> <tr> <td>CANCEL nnn</td> <td>CANCEL 37</td> </tr> </tbody> </table>	Format	Example	CANCEL U=uuuuuuu	CANCEL U=GGS	CANCEL T=ttt	CANCEL T=T031	CANCEL nnn	CANCEL 37
Format	Example									
CANCEL U=uuuuuuu	CANCEL U=GGS									
CANCEL T=ttt	CANCEL T=T031									
CANCEL nnn	CANCEL 37									
DISPLAY ACT DI ACT		Display all sessions except such with status Inactive or Terminate.								
DI ALL		Display all sessions.								
EXIT	PF3	Exit from the display.								
FORCE		Deactivates Natural Monitor monitoring for the specified session. It does not affect the Natural session. A session may be forced by TP user ID, terminal name or session ID. The command format is the same as for the CANCEL command.								
HELP	PF1	Access the help system.								
HIGH	PF7	Display the Highest 20 window for the field marked by the cursor.								
LEFT	PF10	Scroll left one screen.								
LOW	PF6	Display the Lowest 20 window for the field marked by the cursor.								
PICK	PF9	Access a one page window of all the information available for the desired session. Enter PICK nnn with session ID nnn or position the cursor on the desired session line and press PF9.								
RIGHT	PF11	Scroll the display right one screen.								
STERM	PF2	Sort the display by terminal name.								
SSID	PF5	Sort the display by session ID.								
SUSER	PF4	Sort the display by TP user ID.								
TERMNAT		The specified session is terminated normally. A session may be terminated by TP user ID, terminal name or session ID. The command format is the same as for the CANCEL command.								
TOP		Scroll to the top of the display.								
+	PF8	Scroll forward one screen.								

The TERMNAT command causes Natural Monitor to issue an internal Natural cancel against a user. When Natural detects that the user session has been cancelled, the user's Natural session terminates normally.

The CANCEL command functions just like the TERMNAT command, except that an RNMA ABEND is received by the user who is forced and his Natural session is terminated abnormally, causing the ABEND.

The FORCE command deactivates Natural Monitor monitoring for the specified session. It does not affect the Natural session. The forced Natural session continues to run without monitoring.

Additionally, a write-to-operator (WTO) command is issued to the console indicating the user ID of the user who is cancelled, and the user ID and terminal name of the person who issued the CANCEL, TERMNAT or FORCE command.

Using the commands TERMNAT and CANCEL, a running session may be marked to terminate normally or abnormally. This will be honored the next time Natural Monitor gets control within the desired session.

The CANCEL, FORCE and TERMNAT commands may be used from within the individual user summary window as well; however, here there is no need to include the U=user ID, SID, or T=terminalname parameters on either of these commands, since the CANCEL, FORCE or TERMNAT command is issued against the user whose session was displayed in this window.

## Lowest 20 Window

The Lowest 20 window displays one of the following:

- the first 20 users sorted alphabetically from A; or
- the 20 users who are using the least amount of a particular system resource along with the individual usage statistics for that resource for each of the 20 users.

The order of users is by intensity of use. User 01 on the Lowest 20 window represents the least intensive user of the resource.

### To access the Lowest 20 window

Perform one of the following procedures from the Summary of Active Users display:

- position the cursor at any row under the column header that represents the particular resource being monitored and press PF6 (Low); or
- type the command LOW on the command line. Position the cursor at any row under the column header that represents the particular resource being monitored and press Enter.

A window appears similar to the Lowest 20 window shown below:

```

16:53:30                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Summary of Active Users -

+-----+-----+-----+-----+-----+-----+-----+-----+
!                                     - The Lowest 20 -                                     !
!                                     !                                     !
!   Userid   SID  Response Time           Userid   SID  Response Time   !
! 01. REC    13    0.126                   11.         !
! 02. REC    16    0.211                   12.         !
! 03. GGS    12    0.235                   13.         !
! 04. KKR    20    0.340                   14.         !
! 05. REVHIST 1    1.999                   15.         !
! 06. GGS    19    2.267                   16.         !
! 07.         !                                     17.         !
! 08.         !                                     18.         !
! 09.         !                                     19.         !
! 10.         !                                     20.         !
!                                     !                                     !
!                                     !                                     !
! Command ==>                                     !
! Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF12- !
!      Help      Exit                               Pick      Menu  !
+-----+-----+-----+-----+-----+-----+-----+-----+
Help  STerm Exit  SUser SSid Low  High  +  Pick <===  Menu

```

**Note:**

Use of the PICK command/PF9 to access the summary screen for a single user on the Lowest 20 screen is discussed under the heading Summary of Active User Window below.

## Highest 20 Window

The Highest 20 window displays one of the following:

- the last 20 users sorted alphabetically from Z: or
- the 20 users who are using the greatest amount of a particular system resource along with the individual usage statistics for that resource for each of the 20 users.

The order of users is by intensity of use. User 01 on the Highest 20 window represents the most intensive user of the resource.

### To access the Highest 20 window

Perform one of the following procedures from the Summary of Active Users display:

- position the cursor at any row under the column header that represents the particular resource being monitored and press PF7 (High); or
- type the command HIGH on the command line. Position the cursor at any row under the column header that represents the particular resource being monitored and press Enter.

A window appears similar to the Highest 20 window shown below:

```

16:54:14          ***** REVIEW NM UTILITY *****          2000-08-08
                    - Summary of Active Users -

+-----+-----+-----+-----+-----+-----+-----+-----+
!                                     - The Highest 20 -                                     !
!                                                                                               !
!   Userid      SID  Response Time          Userid      SID  Response Time   !
! 01. GGS       19   2.267                11.          12.          12.          !
! 02. REVHIST   1    1.999                12.          13.          13.          !
! 03. KKR       20   0.340                13.          14.          14.          !
! 04. GGS       12   0.234                14.          15.          15.          !
! 05. REC       16   0.211                15.          16.          16.          !
! 06. REC       13   0.126                16.          17.          17.          !
! 07.                                     17.          18.          18.          !
! 08.                                     18.          19.          19.          !
! 09.                                     19.          20.          20.          !
! 10.                                     20.          !
!                                                                                               !
! Command ==>                                     !
! Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10---PF12- !
!      Help           Exit                               Pick           Menu   !
+-----+-----+-----+-----+-----+-----+-----+-----+
      Help  STerm Exit  SUser SSid Low  High  +  Pick <===  Menu
    
```

Use of the PICK command/PF9 to access the summary screen for a single user on the Highest 20 screen is discussed under the heading Summary of Active User Window below.

## Summary of Active User Window

The summary screen for a single user can be accessed from any of the Summary of Active Users display screens by using the Pick function.

 **To access the Summary of Active Users display screens**

Use either the PF9 key or the PICK command:

- To use the PF9 key, position the cursor on the row that corresponds to the user ID for which you want an individual summary display and press the PF9 key.
- To use one of the PICK commands (PICK U=userid, PICK sid, or PICK T=terminalname), type the command on the command line and press Enter.

This command may be Entered from any Review Natural Monitor screen by preceding it with the code NM SA. If you are already in Natural Monitor but are outside the Summary of Active Users function, type in the command preceded by the value SA.

An individual summary window appears similar to the one shown below:

```

16:54:47                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Summary of Active Users -
+-----+-----+-----+-----+
!                               - Summary of User GGS -                               !
!                               !                               !
! Current Status  Inactive                               !
!                               !                               !
! NAT Userid .... GGS          Trans Name .. NC22          Logon Date .. 2000-08-08 !
! NAT Appl ..... GGS          Term Name ... 0773          Logon Time .. 16:45:03  !
! NAT Prog ..... AHHELLO      Session ID .. 19          Trans Date .. 2000-08-08 !
! NAT Stmt ..... 0000         Trans Nr .... 1926         Trans Time .. 16:45:05  !
! NAT Version ... 2.2         Thread Nr ... 3           Num Trans ... 1        !
! NAT Pg Level .. 0          Resp Time ... 2.267       Term Data ... 0        !
!                               !                               !
!                               Database Statistics                               !
! Last Cmd ..... RC          Calls/Tran .. 113.00       !
! Last DBID ..... 10         Curr Calls .. 0          ETime/Call .. 0.014    !
! Last FNR ..... 0          Tot Calls ... 113        CmdT/Call ... 0.00100  !
! Last/Cur Dur .. 0.00656                                         !
!                               !                               !
! Command ==>
! Enter-PF1---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---- !
!           Help  Exit                               Next  Nct                               Menu          !
+-----+-----+-----+-----+
    
```

The Summary of Active User window presents the same information provided on the Summary of Active Users display, but in a different format. Refer to Statistical Fields on the Summary of Active Users Display for an explanation of the relevant fields.

The following commands and PF keys are available from this screen:

PF Key	Command	Description
	CANCEL	Terminate the specified session abnormally.
	FORCE	Deactivate monitoring for the specified session.
	TERMNAT	Terminate the specified session normally.
PF1	HELP	Invoke online help.
PF3	EXIT	Exit this function.
PF8	NEXT	Display the next user from a list of users on the Summary of Active Users screen.
PF9	NCT	Display the Natural call table which contains the programs accessed by the user's last or current transaction.
PF12	MENU	Return to the Natural Monitor Main Menu.

**Note:**

No PF keys are available for the CANCEL, FORCE and TERMNAT commands.

## Accessing the Natural Call Table Window

The Natural Call Table (NCT) contains a list of the Natural programs accessed by the user's last or current transaction and statistics about the database calls issued from these programs.

The NCT is accessible from the individual summary window.

**To access the Natural Call Table window**

- Type in the command NCT and press Enter, or
- Press the PF9 key.

The NCT display spans two windows; the PF keys PF11 and PF10 can be used to toggle between the two.

An example of these windows is shown below. Columns contain asterisks (\*) only if no database information is available because the program issued no database calls. This is the first window:

```

16:54:47          ***** REVIEW NM UTILITY *****          2000-08-08
+-----+-----+-----+-----+-----+-----+-----+-----+
!          !          !          !          !          !          !          !
!          ! NATURAL NATURAL NAT  Num   DB      Total   Total   !          !
!          ! Appl   Prog   Lvl Execs Calls  Elps Time  Cmd Time !          !
! Current ! SYSTEM          0    1    11     0.300   0.01745 !          !
!          ! SYSTEM LOGON    1    1    ***** ***** ***** !          !
! NAT Use ! SYSTEM LOGONUS  1    1     7     0.010   0.00865 ! /08/08 !
! NAT App ! SYSTEM NAT00008  2    1    ***** ***** ***** ! 5:03 !
! NAT Pro ! SYSTEM SECUF    2    3     7     0.359   0.01547 ! /08/08 !
! NAT Stm ! SYSTEM NAT00038  3   10    ***** ***** ***** ! 5:05 !
! NAT Ver ! SYSTEM SECUE    2    1    ***** ***** ***** !          !
! NAT Pg  ! SYSTEM NAT00041  3    2    ***** ***** ***** !          !
!          ! SYSTEM LOGONEX1 2    1    ***** ***** ***** !          !
!          ! SYSTEM LOGONM1  3    1    ***** ***** ***** !          !
! Last Cm ! SYSTEM SECPGM  2    1     1     0.001   0.00054 ! 00 !
! Last DB ! SYSTEM NAT00062 3    4    69     0.643   0.04556 ! 4 !
! Last FN ! SYSTEM SECUC    2    1     3     0.282   0.00777 ! 100 !
! Last/Cu ! SYSTEM SECUH    2    1     2     0.006   0.00633 !          !
!          !          !          !          !          !          !          !
! Command ! Command ==>
! Enter-P ! Enter-PF1---PF3---PF7---PF8---PF9---PF10--PF11--PF12--- ! 2---- !
!          H !          Help Exit -    +    Refr          ==> Menu ! u !
+-----+-----+-----+-----+-----+-----+-----+-----+
    
```

This is the second window:

```

16:54:47                ***** REVIEW NM UTILITY *****                2000-08-08
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
!                                     - NATURAL Call Table -                                     !
! NATURAL      NAT              Rsp      High      High      !           !
! Prog        Stmt Cmd DBID  FNR Code  Elps Time  Cmd Time  !           !
! Current     0000 S1   10   50   0    0.147   0.01041  !           !
! *****    **** ** ***** **** **  ***** ***** !           !
! NAT Use     LOGONUS  6228 CL   10   0    0.006   0.00628  ! /08/08 !
! NAT App     *****  **** ** ***** **** **  ***** ***** ! 5:03  !
! NAT Pro     SECUF    4220 L3   10   33   0    0.015   0.00584  ! /08/08 !
! NAT Stm     *****  **** ** ***** **** **  ***** ***** ! 5:05  !
! NAT Ver     *****  **** ** ***** **** **  ***** ***** !           !
! NAT Pg      *****  **** ** ***** **** **  ***** ***** !           !
!             *****  **** ** ***** **** **  ***** ***** !           !
!             *****  **** ** ***** **** **  ***** ***** !           !
! Last Cm     SECPGM   4980 OP   10   45   0    0.001   0.00054  ! 00    !
! Last DB     NAT00062 2630 L3   10   45   0    0.093   0.00758  ! 4     !
! Last FN     SECUC    6820 N1   10   33   0    0.220   0.00577  ! 100   !
! Last/Cu     SECUH    3670 CL   10   0    0    0.005   0.00593  !           !
!             !                                           !           !
! Command     Command ==>                               !           !
! Enter-P     Enter-PF1---PF3---PF7---PF8---PF9---PF10---PF11---PF12--- ! 2----- !
! H           Help Exit - + Refr <=== Menu           ! u     !
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
    
```

The following fields are shown on these screens:

Field	Description
Natural Appl	The Natural application of the program.
Natural Prog	The name of the Natural program.
NAT Lvl	The call level of the Natural program.
Num Execs	The number of times the Natural program was called during the last transaction.
DB Calls	The total number of database calls issued by the program during the last transaction.
Total Elps Time	The total amount of elapsed time (seconds) to process all of the database calls issued by the program during the last transaction.
Total Cmd Time	The total amount of time (seconds) required by the database to process all DB calls of the program during the last transaction.
NAT Stmt	The statement line number in the Natural program that generated the database call with the highest database command time.
Cmd	The database command issued by the program that resulted in the highest database command time.
DBID	The database ID accessed by the database call that resulted in the highest database command time during the program..
FNR	The database FNR accessed by the database call that resulted in the highest database command time during the program.
Rsp Code	The database response code of the database call that resulted in the highest database command time during the program.
High Elps Time	The database elapsed time (seconds) of the database call that resulted in the highest database command time during the program.
High Cmd Time	The highest database command time (seconds) for a database call during the execution of the Natural program.

The following commands and PF keys are available from these windows:

PF Key	Command	Description
PF1	HELP	Invoke online help.
PF3	EXIT	Exit this function.
PF7	-	Scroll backward one display.
PF8	+	Scroll forward one display.
PF9	REFRESH	Refresh the Natural Call Table display with updated information.
PF10	LEFT	Scroll left one screen.
PF11	RIGHT	Scroll right one screen.
PF12	MENU	Return to the Review Natural Monitor Main Menu.

# Technical Information

This section covers the following topics:

- Functional Overview
- Accessing the Environmental Information
- Accessing the History Session Control

## Functional Overview

The Technical Information function displays Natural Monitor environmental information and history session information.

### Purpose of the Technical Information Function

This function is useful for determining the following:

- **Environmental Information**
  - the environment in which Natural Monitor is executing;
  - the version maintenance levels of the Natural Monitor code; and
  - various parameters and statistical information.
- **History Session Control**
  - shows details about the Natural Monitor history session definitions and history session status; and
  - allows starting and stopping the history session.

### Accessing the Technical Information Function

You can access the Natural Monitor Technical Information function in one of two ways:

- from any screen **outside** the Natural Monitor System, type the code NM TE on the command line and press Enter; or
- from any screen **within** the Natural Monitor System, type TE on the command line and press Enter.

```

16:05:44          ***** REVIEW NM UTILITY *****          2000-08-08
                   - Technical Information -

                Code          Description
                EI            Environmental Information
                HC            History Session Control

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
                Help          Exit                                Menu
    
```

The functions available from this menu are described in the following table:

Code	Function	Description
EI	Environmental Information	Gives an overview of the environment.
HC	History Session Control	Shows details about the history session and allows starting and stopping the history session.

## Accessing the Environmental Information

 **To access the Environmental Information screen**

- Type EI on the command line and press Enter.

The Environmental Information screen appears as shown below:

```

16:06:46                ***** REVIEW NM UTILITY *****                2000-08-08
                        - Environmental Information -

TP System ..... CICS/MVS 2.1.0  Reports Currently Active                2
Natural Code Version ..... SYSRNM 3.6.1  Max. Active Reports .....                2
Driver Version ..... NATGWREV 3.6.1  Report Start Requests ....                2
Assembly Date ..... 2000/08/11
Assembly Time ..... 13:51:00  Session Logons .....                1
                                           Session Logoffs .....                0
Number of RUABs Allocated .... 1  Sessions Logged On .....                1
Number of Entries per NCT .... 32  Max. Sessions Logged On ..                1
System Start Date ..... 2000/09/01
System Start Time ..... 09:48:21  Total Transactions .....                62
                                           Average Response Time ....                0.149

Shared Storage Allocated ..... 7712
Max. Shared Storage Alloc. ... 7712  Total Database Calls .....                4697
                                           Average Database Time ....                0.001
                                           Average Adabas Cmd Time ..                0.00012

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help      Exit                HC                Canc
    
```

The following commands are available:

Command	PF Key	Description
HC	PF8	Go to History Session Control.
RESET		Reset all transaction and database statistic field values to zero and release all unused RUAB storage.

The following fields are displayed for this function:

Field	Description
TP System	CICS version under which the Natural Monitor is executing.
Natural Code Version	The version of the Natural code of Natural Monitor in library SYSRNM.
Driver Version	The version of the linked nucleus module of Natural Monitor.
Assembly Date	Assembly date of the Natural Monitor system control block RNMSCB.
Assembly Time	Assembly time of the Natural Monitor system control block RNMSCB.
Number of RUABs Allocated	The number of Natural Monitor user account blocks (RUABs) allocated in CICS shared storage. One RUAB is used to monitor one Natural session. It can be reused after session termination.
Number of Entries per NCT	Number of entries in the Natural Call Table (NCT) of Natural Monitor. The NCT is part of each RUAB. It is used to monitor the usage of the Natural objects executed during one session.
System Start Date	The date when the first Natural session was monitored by Natural Monitor.
System Start Time	The time when the first Natural session was monitored by Natural Monitor.
Shared Storage Allocated	The total amount of CICS shared storage in bytes acquired by Natural Monitor.
Max. Shared Storage Alloc.	The highest amount of CICS shared storage in bytes acquired by Natural Monitor since system startup.
Reports Curr. Active	The number of reports that are currently active.
Report Start Requests	The total number of report start requests since system startup.
Session Logons	The total number of Natural sessions which were monitored by Natural Monitor since system startup.
Session Logoffs	The total number of Natural sessions terminated which were monitored by Natural Monitor.
Session Logged On	The number of Natural sessions currently monitored by Natural Monitor.
Max. Sessions Logged On	The maximum number of Natural sessions concurrently monitored by Natural Monitor.
Total Transactions	The total number of Natural transactions monitored by Natural Monitor. A transaction lasts from screen input time until next screen output.
Average Response Time	The average response time in seconds for all transactions monitored by Natural Monitor.
Total Database Calls	The total number of database calls for all sessions monitored by Natural Monitor.
Average Database Time	The average database call response time for all sessions monitored by Natural Monitor.
Average Adabas Command Time	The average Adabas call command time for all sessions monitored by Natural Monitor. The command time value is passed back by Adabas with every Adabas call.

## Accessing the History Session Control

 To access the History Session Control screen:

- Type HC on the command line and press Enter.

The History Session Control screen appears as shown below:

```

10:20:27                ***** REVIEW NM UTILITY *****                2000-09-01
                        - History Session Control -

Transaction Id ..... QA31 Start Date ..... 2000/09/01
Current Status ..... active Start Time ..... 10:20:22
Natural User Id ..... REVHIST End Date .....
Database Id of Repository File .. 0 End Time .....
Database Fnr of Repository File .. 0
Date Format in Repository File .... OLD
Logging of empty reports ..... NO

                        Dynamic Profile Parameters

PROFILE)RNM36T
AUTO=ON PC=OFF ETID=' ' PROGRAM=' ' PSEUDO=OFF
SENDER=CONSOLE ASYNNAME=REVHIST STACK=(LOGON SYSRNM;P-NMHIST)

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help      Exit      EI      Canc
    
```

The following commands are available:

Command	PF Key	Description
EI	PF7	Go to Environmental Information.
START		Start the Natural Monitor history session.
STOP		Terminate the Natural Monitor history session.

The following fields are displayed for this function:

Field	Description
Transaction Id	The CICS transaction under which the Natural Monitor history session is running.
Current Status	<p>The current status of the history session. This field can have the following values:</p> <p>not started    No session started</p> <p>initializing    Session initializing</p> <p>active            Processing history data</p> <p>inactive        Waiting for interval time expired</p> <p>terminating    Session terminating</p>
Natural User Id	The Natural user ID (*USER) of the Natural Monitor history session.
Database Id of Repository File	The database ID number of the Natural Monitor repository file.
Database Fnr of Repository File	The database file number of the Natural Monitor repository file.
Date Format in Repository File	<p>Indicates the date format for reports written to the repository file. Possible values are:</p> <p>OLD    The date format is YY/MM/DD</p> <p>NEW    The date format is YYYYMMDD</p>
Logging of empty reports	Indicates whether empty reports are written to the repository file. Possible values are: YES or NO.
Start Date	The start date of the Natural Monitor history session.
Start Time	The start time of the Natural Monitor history session.
End Date	The termination date of the Natural Monitor history session.
End Time	The termination time of the Natural Monitor history session.
Dynamic Profile Parameters	The dynamic profile parameters for the start of the Natural Monitor history session.

# Administrative Functions

Review Natural Monitor administrative functions are discussed in two sections:

- the User Profile System, which is used to generate profiles that define access rules for Review Natural Monitor users; and
- functions that pertain specifically to Natural Monitor.

This section covers the following topics:

- User Profile System
  - Using NATURAL User Exits
  - Accessing Historical Data in the NM Repository File
  - Setting Configuration Parameter Values
- 

## User Profile System

**Note:**

See *Installing Review Natural Monitor, Storage Requirements*, for an explanation of the effect of many users on CICS SHARED storage requirements.

The User Profile system provides a series of menus to help you generate profiles that define access rules for Review Natural Monitor users. You may create profiles for new users, change access rules for existing users, and purge user profiles that are no longer required.

Review Natural Monitor provides a default profile to allow access for users who do not have a profile defined for them. When a user logs on, Review Natural Monitor checks the Natural library SYSRNM for the user's profile. If one is not found, the default profile is used.

The default profile is also used as a basis for creating user profiles. When a profile for a new user is generated, the default profile is copied. The new profile may then be customized to suit the needs of the user.

**Note:**

The default profile provides unrestricted access to Review Natural Monitor systems and functions. It is recommended that you first create a user profile for the system administrator and other privileged users; then modify the default profile so that it conforms to the needs of the majority of users.

## Accessing the User Profile System

 **To access the User Profile System**

- Enter the **UP** code on the command line of the Review Natural Monitor Main Menu and press Enter.

The User Profile System menu appears as shown below:

```

16:59:08                *****  R E V I E W  *****                2000-08-08
                        User Profile System

                        Code           Description
                        EU             Edit User Profile
                        LU             List User Profiles

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help           Exit                                     Menu
    
```

The following commands enable you to create and edit profiles, and display lists of existing profiles:

Command	Description
EU	Edits a profile for a new or existing user.
LU	Displays a list of existing user profiles, including the default profile.

From the list of existing user profiles, you can select a particular profile to be edited or purged.

## Customizing the Default Profile

You do not need to create a user profile for each user of Review Natural Monitor. By customizing the default profile so that the access rules meet the needs of the majority of Review Natural Monitor users, you eliminate the need for individual user profiles.

You can access the Edit User function to edit the default profile in two ways.

### To access the Edit User screen

- From any screen within Review Natural Monitor, type UP EU DEFAULT on the command line and press Enter.
- From any screen within the User Profile system, type EU DEFAULT on the command line and press Enter.

The following Edit User screen is displayed:

```

16:59:54          *****  R E V I E W  *****                2000-08-08
                        Edit User

                        User Profile: DEFAULT_

Please Mark Categories to Select

General ..... _

NATURAL MONITOR ..... _

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help           Exit           Save  Accpt                               Menu
    
```

The User Profile field usually refers to the user ID corresponding to the profile; in this case it contains the word DEFAULT. The categories on the screen refer to types of access rules as described in the following table:

Category	Description
General	Access rules that affect all of the systems within Review Natural Monitor. Valid values are Y/N.
NATURAL MONITOR	Access rules pertaining to the Natural Monitor system. Valid values are Y/N.

For the user’s default profile, you need to modify the general access rules in addition to those pertaining to Natural Monitor.

### Displaying General Access Rules

When you select the general access rules, the General window appears as shown in the following screen:

```

                        General

Name: _____

Access NATURAL MONITOR System ..... Y
Access User Profile System ..... Y
Default Menu ..... MM
Confirm Purge/Save Requests ..... Y

PF3=Exit  PF6=Accept
    
```

The Name field may be used for the user’s name or any other appropriate identifier.

The following table describes the general access rules that appear in the General window. The default values are underlined.

General Access Rule	Value	Description
Access NATURAL MONITOR System	<u>Y</u>	The user may access the Natural Monitor system.
	N	The user may <b>not</b> access the Natural Monitor system.
Access User Profile System	<u>Y</u>	The user may access the User Profile system.
	N	The user may <b>not</b> access the User Profile system.  <b>Note:</b> Before setting this access rule to N in the default profile, you must first create a user profile that allows you to access the User Profile system. <b>Otherwise, you will not be able to maintain user profiles.</b>
Default Menu	Determines which menu screen appears on the user's terminal when the user logs on to Review Natural Monitor.	
	<u>MM</u>	REVIEW Natural Monitor Main Menu
	NM	Natural Monitor Main Menu
	UP	User Profile System Main Menu
Confirm Purge/Save Requests	<u>Y</u>	Review Natural Monitor will prompt the user to confirm the request before the command is executed.
	N	Review Natural Monitor will <b>not</b> prompt the user to confirm the request before the command is executed.

### Displaying the Natural Monitor Access Rules

When the Natural Monitor category is selected, the Natural Monitor window appears displaying access rules as shown below:

```

                                NATURAL MONITOR

CANCEL/FORCE/TERMNAT/START/STOP Cmd .. Y
Edit Report Definitions ..... Y
Purge Historical Data ..... Y
Purge Report Definitions ..... Y
Purge Started Reports ..... Y
Start Reports ..... Y
View Reports ..... Y

PF3=Exit  PF6=Accept
    
```

The following table describes the Natural Monitor access rules that appear in the NATURAL MONITOR window. Default values are underlined.

Natural Monitor Access Rule	Value/Description
CANCEL/FORCE/TERMNAT/START/STOP Cmd	Y The user may issue a CANCEL, FORCE, TERMNAT, START or STOP command. N The user may <b>not</b> issue a CANCEL, FORCE, TERMNAT, START or STOP command.
Edit Report Definitions	Y The user may edit response time reports (RT function). N The user may <b>not</b> edit response time reports.
Purge Historical Data	Y The user may delete historical data. N The user may <b>not</b> delete historical data.
Purge Report Definitions	Y The user may delete response time report definitions. N The user may <b>not</b> delete response time report definitions.
Purge Started Reports	Y The user may delete the data accumulated by response time reports that have been started. N The user may <b>not</b> delete the data.
Start Reports	Y The user may initiate data accumulation by starting response time reports. N The user may <b>not</b> start response time reports.
View Reports	Y The user may view the results of started response time reports online. N The user may <b>not</b> review the results of started response time reports online.

### Modifying Access Rules

You may modify access rules by typing over the settings displayed on the screen. When you have made all of the changes to a particular group of access rules, you have the following options:

- To exit without saving the changes, press PF3 or enter the EXIT command.
- To save the changes temporarily while you edit the next access rules screen, press PF6 or enter the ACCPT command.
- To save the changes to the Natural library, press PF5 or enter the SAVE command.

If you selected more than one category, pressing PF3 or PF6 displays the next access rules screen instead of returning you to the previous screen.

### Creating a User Profile

 **To create a user profile**

- From any screen within Review Natural Monitor, type the following string on the command line and press Enter:

UP EU userid

- From any screen within the User Profile system, type the following string on the command line and press Enter:

EU userid

The User Profile system creates a profile for the user by copying the default profile. It then displays the user profile for editing, and the following message appears at the bottom of the screen:

REV00101 - NEW USER PROFILE

If you wish to customize the user’s profile, mark the appropriate categories by typing a character on the line following your selection:

- To change access to two Review Natural Monitor systems, mark the General category.
- If you wish to modify access to certain Natural Monitor system functions, mark the Natural Monitor category.

When the profile provides appropriate access privileges for the user, press PF5 to save the profile to the Natural library.

Refer to Customizing the Default Profile for information regarding access rules for the various categories.

### Using the List User Profiles Function

The List User Profiles (LU) function displays a list of user profiles that are stored in the Natural library SYSRNM.

 **To access the list of user profiles**

- Enter the code LU on the command line of the User Profile System menu and press Enter.

The User Profiles screen, similar to the one shown below, is displayed:

```

11:15:14          ***** R E V I E W N M U T I L I T Y *****          2000-09-01
                        User Profiles

   Sel  Userid      Name                               Sel  Userid      Name

!  ___  DEFAULT
!  ___  GGS

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help           Exit                               +                               Menu

```

From this screen, you may edit or purge a particular user profile.

▶ **To access the Available Functions window that displays the available commands**

- Enter a question mark (?) on the selection line preceding a profile name as shown below and press Enter.

The Available Functions window, similar to the one shown below, is displayed:

```
Available Functions

EU  Edit User Profile
PU  Purge User Profile
.   EXIT
___ Enter Function
```

## Editing a User Profile

▶ **To edit an existing user profile**

- Enter the command EU on the selection line preceding the profile name.

The profile is displayed and can be edited. Refer to Customizing the Default Profile for additional information.

If you are editing your own user profile, the changes you make take effect as soon as you save your profile. If you are editing a profile other than your own, the changes do not take effect until the user next logs on to Review Natural Monitor.

You may also use this command to copy an existing profile to create a profile for a new user. If you have several users who require access privileges that are different from those specified in your default profile, you may use an existing profile as a model for the other profiles.

## Copying a User Profile

▶ **To copy a profile**

1. Enter the command EU on the selection line preceding the profile name to be copied.
2. Type the new user ID on the line labeled "User Profile".
3. Press PF5 to save the new user profile.

## Purging a User Profile

▶ **To delete a user profile**

- Enter the command PU on the selection line preceding the profile name.

Depending on the setting in your profile, you may or may not be prompted for confirmation of the purge command as shown in the following screen:

```

11:17:35          *****  R E V I E W  N M  U T I L I T Y  *****          2000-09-01
                        User Profiles

Sel  Userid      Name                      Sel  Userid      Name
---  -
PU   DEFAULT
     GGS

                                +-----+
                                !
                                ! Please confirm PURGE request for: !
                                !
                                !           GGS                       !
                                !
                                !           (Y or N) Y                 !
                                !
                                +-----+

Command ==>
Enter-PF1---PF2---PF3---PF4---PF5---PF6---PF7---PF8---PF9---PF10--PF11--PF12---
      Help           Exit                               +                               Menu
    
```

## Using NATURAL User Exits

Review Natural Monitor has two Natural user exits which are applicable to the Review Natural Monitor components:

- P-UEXIT1
- P-UEXIT2

These exits are located in SYSRNM, the Review Natural Monitor system library in Natural. They can be modified using the Natural editor.

### P-UEXIT1

This program is invoked when the online portion of Review Natural Monitor is **entered**. You may insert code into this program to satisfy site-specific needs.

Possible uses for this exit include:

- Setting colors on (SET CONTROL 'T3279').
- Turning the PC mode on or off.

**Note:**

This program **must not** alter the NATURAL stack, and it **must end** with a STOP command.

### P-UEXIT2

This program is invoked when the online portion of Review Natural Monitor is **terminated**. You may insert code in this program to alter the processing that occurs when terminating Review Natural Monitor.

Possible uses for this exit include:

- Terminating your Natural session.
- Logging on to another Natural application.
- Returning to a previous Natural application (using SETUP/RETURN).

## Using the Review Natural Monitor User Exit: Response Time Detail Record

Each time a transaction finishes (a terminal write is performed), Review Natural Monitor creates a record that contains information about the resources consumed by that transaction:

- the response time for the transaction;
- the number of database calls issued for the transaction;
- the total database elapsed time and command time for all calls issued; and
- information about the user who performed the transaction.

A user exit (RNMRTUEX) is provided with Review Natural Monitor to allow the user to handle this information as follows:

- examine the record;
- process the record; and
- accept or reject the record's inclusion into any active Review Natural Monitor response time reports.

The user can also write this record to a sequential data set or to SMF (System Management Facility) for later processing or as input to a chargeback system.

A sample RNMRTUEX user exit is supplied in the Review Natural Monitor source library. A copy book containing a DSECT mapping the detailed record is also provided.

This user exit can be modified to suit the needs of a user site and must be linked into the Natural nucleus with the rest of the Review Natural Monitor code in the step that links the Natural nucleus with Review Natural Monitor (see Installing Review Natural Monitor, Step 6 of the Installation Procedure).

## Calling Conventions to Invoke the User Exit

The following calling conventions are used to invoke the RNMRTUEX user exit:

- Register contents when entering the user exit:
  - Register 1: Address of the parameter list
  - Register 13: Address of an 18-fullword save area
  - Register 14: Return address in the calling module
  - Register 15: Entry address within RNMRTUEX
- Register contents returned by the user exit:
  - Register 1: Address of the parameter list
  - Registers 2 through 13: **Must be unchanged.**
- Content of parameters passed:
  - Word 1: For record type 1: Response time report detail record
  - Word 2: Address of the response time report detail record
- Return codes passed using Register 15:
  - Zero(0): Process the record for all active response time reports
  - Non-zero(0): Reject the record for response time report processing

## Accessing Historical Data in the NM Repository File

The Natural Monitor repository file contains Natural Monitor response time report definitions and historical data for response time reports that have a history interval. The historical data can be accessed by user-written applications and used as input for other processing (for example, trend analysis).

The view for this file is called REVIEW-NM-FILE.

The file can be read using the following key definition against the view field NM-KEY:

1	REPORT-KEY	(A50)
1	REDEFINE REPORT-KEY	
2	REPORT-SUBSYSTEM	(A02)
2	REPORT-DATE	(N08)
2	REPORT-TIME	(N06)
2	REPORT-NAME	(A32)
2	REPORT-SEQ	(B02)

where:

Field	Description
REPORT-SUBSYSTEM	RT for the Response Time subsystem.
REPORT-DATE	Date (in YYYYMMDD format) that the historical data record was written.
REPORT-TIME	Time (in HHMMSS 24-hour format) that the historical data record was written.
REPORT-NAME	Response time report name for which the historical data record was written.
REPORT-SEQ	Record type for the historical data record. Record type 1 is used for response time interval data (corresponding to the VW or VH display in the Response Time subsystem). Record types 2 through n are used for response time detail records (corresponding to the VD display in the Response Time subsystem). The first detail record written for a given history interval will have a REPORT-SEQ = 2, and for each additional detail record written, the REPORT-SEQ field will increment by 1.

Two sample Natural programs are provided in the Natural Monitor library (SYSRNM) which read Response Time subsystem historical data. These two programs are called HISTORY1 and HISTORY2.

HISTORY1 is an example of how to read the response time interval history data (corresponding to the VW or VH command in the response time subsystem). For a specific response time report within a specified date and time range, HISTORY1 reads all associated response time interval history records and performs some summary statistical evaluation.

HISTORY2 is an example of how to read the response time detail history records (corresponding to the VD command in the response time subsystem). For a specific response time report within a specified date and time range, HISTORY2 reads all associated response time detail history records and displays summary information of the 20 detail records had the highest response time.

In addition to the two sample Natural programs, a Natural local data area (LDA) called L-NMHIST is provided which incorporates fields from the Natural Monitor DDM. This LDA may be used by user-written programs to read the Natural Monitor repository file. See #for the contents of this LDA.

## Setting Configuration Parameter Values

See Installing Review Natural Monitor, Storage Requirements, for an explanation of the effect of many response time reports on CICS SHARED storage requirements.

Within Natural Monitor, the Review Natural Monitor administrator modifies the configuration program for the following reasons:

- to control the generation of historical data for response time reports;
- to control the intervals used for collection; and
- to set other response time report parameters.

The administrator uses parameters in the program **P-NMCONF** in library **SYSRNM** to control historical data and other response time report options.

The P-NMCONF program contains default configuration values for new response time report definitions. Parameter values set in the distributed P-NMCONF program are normally not changed until the default values have been in use for a test period. P-NMCONF program parameter values generally depend on the site's workload, application use, and response time.

The P-NMCONF program is a Natural program called from Review Natural Monitor code to set defaults in the Review Natural Monitor global data area. It can be edited just as any Natural program can be edited.

### To access and edit the P-NMCONF configuration program

1. Type LOGON SYSRNM at the NATURAL NEXT prompt and press Enter.
2. Type EDIT P-NMCONF and press Enter.
3. Modify the P-NMCONF program by typing over the existing values.

**Note:**

P-NMCONF parameters and values are discussed in the following sections. Default values are underlined.

4. Type STOW and press Enter to save and catalog the changes.
5. Type MENU at the prompt to return to Review Natural Monitor.

The changes you make to P-NMCONF take effect immediately.

## P-NMCONF Response Time Parameters

The +RT-INTERVAL and +RT-THRESHOLD parameters are used in conjunction with one another to control the color and monochrome attributes of response time reports.

Parameter	Description
+RT-INTERVAL	Specifies the reporting interval (in seconds) used to graph a report horizontally and vertically. Valid values are 0.1 to 99.9 (default is <u>0.5</u> ).
+RT-THRESHOLD	Specifies the transaction response time value (in seconds) above which Review Natural Monitor creates detailed records for the Detailed Records table. Valid values are 0 to 99.9 (default is <u>3.5</u> ).
+RT-MAX-DETAIL-RECS	Specifies the maximum number of detailed response time records to be retained. Valid values are 0 to 999 (default is <u>20</u> ).
+RT-WRAP-OPTION	Specifies the wrap option. Valid values are:  <u>NONE</u> Detailed response time records are retained to the limit specified by the RT-MAX-DETAIL-RECS parameter.  STD (standard) The most current response time records are retained.  HIGH The response time records with the highest value are retained.
+RT-TS-OPTION	Specifies the transaction summary option. Valid values are:  <u>NONE</u> No transaction summary is created.  SUM A transaction summary is created for the root transaction program; for example, N222 or N314 for Natural.  DET A detailed transaction summary is created that includes Natural application information.

### P-NMCONF Report Parameter

Parameter	Description
+RT-AUTOSTART	Specifies the autostart option. Valid values are:  <u>Y</u> Report is autostarted by the Review Natural Monitor history task when it initializes.  N Report is <b>not</b> autostarted.

### P-NMCONF Historical Data Parameters

Parameter	Description				
+RT-HISTORY-INTERVAL	Specifies the interval (in minutes) at which response time historical data is written to the Natural Monitor repository. Valid values are 0 to 999 minutes (default is <u>0</u> ).  <b>Note:</b> A value of zero (0) prevents historical data from being written.				
+RT-HISTORY-REFRESH	Specifies whether the response time report that has a history interval should be refreshed after the history interval has expired.  <table border="1"> <tr> <td><u>Y</u></td> <td>The history report is refreshed.</td> </tr> <tr> <td>N</td> <td>The report is <b>not</b> refreshed.</td> </tr> </table>	<u>Y</u>	The history report is refreshed.	N	The report is <b>not</b> refreshed.
<u>Y</u>	The history report is refreshed.				
N	The report is <b>not</b> refreshed.				

# Function Codes and Commands

This section covers the following topics:

- Command Modes
  - Function Codes
  - Commands
- 

## Command Modes

The Command line appears at the bottom of each screen in Review Natural Monitor. It is used to access a specific function and/or to issue a processing command.

Review Natural Monitor provides a menu structure to help access specific screens and issue related commands. Experienced users of Review Natural Monitor often bypass the menu structure by typing a string of function codes on the Command line, in some cases followed by a command.

### Example:

- Using the menu structure, you can access the Edit Report screen only by first accessing the Response Time Subsystem menu from the Natural Monitor System menu.
- Using a function code string, you can access the Edit Report screen directly from the Natural Monitor System menu:

```
RT ER reportname
```

The tables below list the function codes, PF keys, and commands available within Natural Monitor.

---

## Function Codes

Valid function codes are listed on menu screens. A string of function codes must reflect the sequence of menu screens for the particular system of Review you are accessing. Refer to the Review Natural Monitor System Diagram for the specific sequence of function codes.

To access the Natural Monitor system from User Profile System and vice versa, prefix the function code string with the appropriate system code as follows:

- **NM** for Natural Monitor
- **UP** for User Profile System

The following table lists function codes for Natural Monitor:

Function	Code	Description
RT	ER	Edit report definitions.
RT	EX	Expanded history list.
RT	LH	List history reports.
RT	LR	List report definitions.
RT	LS	List started reports.
RT	PH	Purge history reports.
RT	PR	Purge report definition.
RT	PS	Purge started report.
RT	PX	Purge start range.
RT	PY	Purge end range.
RT	RF	Refresh started report.
RT	RT	Display Response Time Subsystem menu.
RT	ST	Start report.
RT	VD	View detailed records.
RT	VH	View graph horizontally.
RT	VT	View transaction summary.
RT	VW	View graph vertically.
SA	SA	Display Summary of Active Users report.
TE	EI	Environmental information.
TE	HC	History session control.
UP	EU	Edit user profiles.
UP	LU	List user profiles.
UP	UP	Display User Profile System menu.

## Commands

The following table describes commands used within Natural Monitor.

The Use category in the table lists the functions in which the command applies. Subfunctions are separated from the function with a slash (/); multiple subfunctions are separated from each other by a dash (-).

Command	PF Key	Description	Use
+, FWD	PF8	Scroll forward one screen.	In several functions.
-, BACK	PF7	Scroll backward one screen.	In several functions.
- -, TOP		Position to the top.	In several functions.
ACALL	PF7	Display the average number of database calls issued for each transaction within a specific response time interval or range.	RT/VH-VW

CALLS	PF5	Display the total number of database calls issued for the total number of transactions within each specific response time interval or range.	RT/VH-VW
CANCEL		Terminate specified session abnormally. A session may be cancelled by TP user ID, terminal name, or session ID (SID). See below:  CANCEL U=userid CANCEL sid CANCEL T=terminalname	SA, SA/PICK
COLOR OFF		Return the terminal display to monochrome.	All
COLOR ON		Set the terminal display to color.	All
CURR	PF2	Toggle to current data from historical data.	RT/EX-VD-VH-VW
DETAIL DET	PF5	Provide detailed information about Natural applications and program usage.	RT/VT
DISPLAY DI		Valid versions of this command are:  DISPLAY ACT DISPLAY ALL  The DISPLAY ACT version of the command causes all users except those with status Inactive or Terminate to be displayed. The DISPLAY ALL version causes a list of all users who have invoked Natural to be displayed, regardless of whether they are currently active.	SA
END	PF12	End the Review session.	All
ER		Access the Edit Report screen for a report on the list.	RT/all
EX		List dates and time of historical snapshots.	RT/all
EXIT	PF3	Return to the previous screen, or return to a main menu.	All
FIN	PF12	End a Review session.	All
FORCE		Deactivates Review monitoring for the specified session. It does not affect the Natural session. A session may be forced by TP user ID, terminal name or session ID. Valid versions of this command are:  FORCE U=userid FORCE sid FORCE T=terminalname	SA, SA/PICK
HELP	PF1	Access the help system. Valid command syntax: HELP [command]	All
HIGH	PF7	Display The Highest 20 window from the Summary of Active Users display.	SA
HIST	PF2	Access historical data.	RT/VD-VH-VW
HORI	PF10	Display a horizontal graph.	RT/VW-VH
LEFT	PF10	Scroll display left one screen.	RT/VD, SA/PICK/NCT, SA
LFILE		Display and change LFILE settings.	All
LOGO		Display the logo screen.	All

LOW	PF6	Display The Lowest 20 window from the Summary of Active Users display.	SA
MENU	PF12	Return to the Review Natural Monitor main menu.	All
MSG		Display an extended error message online. Example: MSG REV00001, MSG1	All
NCT	PF9	Display the Natural call table listing programs accessed by user's last or current transaction.	SA/PICK
NEXT		Go to the next time interval of historical data.	RT/LH/VD-VH-VW
NEXT	PF8	Display the next user from a list of users on the Summary of Active User's screen.	SA/PICK
PH		Purge a historical snapshot	RT/LH-LR-LS-EX
PICK	PF9	Select one of the following for display: database, buffer pool display, transaction, user ID.	RT/VD, SA, SA/HIGH-LOW
PR		Purge a report definition	RT/LR-LS
PREV		Go to the previous time interval of historical data.	RT/LH-VD-VH-VW
PS		Purge a started report.	RT/LR-LS
PX		Purge start range.	RT/LH-LR-LS/EX
PY		Purge end range.	RT/LH-LR-LS/EX
QUIT	PF12	End the Review session.	All
REFRESH	PF9	Refresh the Natural call table display with updated information.	SA/PICK/NCT
RESET		Reset all transaction and database statistic fields to zero and release all unused RUAB storage.	TE/EI
RF		Restart a started report.	RT/LR-LS
REVPROD		Display version number of all subsystems being used in this session of Review Natural Monitor.	All
RIGHT	PF11	Scroll display right one screen.	RT/VD, SA/PICK/NCT, SA
SAVE	PF5	Save report or other data	RT/ER
ST	PF6	Start report or simulation.	RT/ER
START		Start the Natural Monitor history session.	All
STERM SORTTERM		Sort users in ascending order by terminal name.	SA
SSID SORTSID	PF5	Sort users in ascending order by SID.	SA
STOP		Terminate the Natural Monitor history session.	TE/HC
SUM SUMMARY	PF6	Summarize transactions; does not display detailed Natural program data.	RT/VT
SUSER SORTUSER	PF4	Sort the Summary of Active Users display by user ID. Use: SA	PF4

TERM TERMNAT		Terminate specified session normally. A session may be terminated by TP user ID, terminal name, or session ID. The command format is the following: TERMNAT U=userid TERMNAT sid TERMNAT T=terminalname	SA, SA/PICK
TOGGLE		Switch between current and history report data.	RT/VD-VH-VW
TOP		Return to the top of the display.	RT/EX-LH-LR-LS-VD-VT, SA
TRANS	PF4	Display response times, for transactions, in vertical or horizontal graph. (system default)	RT/VH-VW
VD		Display detailed records for a report.	RT/all
VERT		Display a vertical graph.	RT/VH-VW
VH		Display a horizontal graph.	RT/all
VT		Display a transaction summary.	RT/LR-LS
VW		Display a historical snapshot or vertical graph.	RT/all

# Local Data Area View Description

In the following table, all fields are listed and described in the order in which they appear in the local data area L-NMHIST. The actual file listing follows the table.

D in the DE column indicates that the field is a descriptor. A format indicator followed by a numeric field length is found in the Format/Length column. Possible format indicators include A (alphanumeric), B (binary), and N numeric.

Lvl Field	DE	Format/Length	Description
1 REVIEW-NM-FILE-VIEW			View name to be used when reading the Natural Monitor repository file.
2 CONTROL-FIELDS			History record control fields group name.
3 NM-SUBSYSTEM		A2	Natural Monitor subsystem type. Response time subsystem history records have a NM-SUBSYSTEM value of RT.
3 NM-DATE-SAVED		N8.0	For RT subsystem history reports this field contains the date (in YYYYMMDD format) that the record was saved.
3 NM-TIME-SAVED		N6.0	For RT subsystem history reports this field contains the time (in HHMMSS 24-hour format) that the record was saved.
3 NM-DATE-COMPLEMENT		N8.0	For RT subsystem history reports this field contains the twos-complement of the date that the record was saved.
3 NM-TIME-COMPLEMENT		N6.0	For RT subsystem history reports this field contains the twos-complement of the time that the the record was saved.
3 NM-SORT-FLD		A32	For RT subsystem history reports this field contains the report name for which the record was saved.
3 NM-SEQ		B2	For RT subsystem history reports this field contains the record sequence number for the record that was written. A value of 1 in this field denotes that the record is a response time interval record (corresponding to the VW and VH display). A value greater than 1 in this field denotes the record sequence number for detailed records.
2 NM-RECORD-TYPE		B4	This field is not currently used.
2 RESPONSE-TIME-SUBSYSTEM			Response time subsystem fields group name.

The following fields refer to response time subsystem report definitions (ER (edit report) command):

Lvl Field	DE	Format/ Length	Description
3 RT-REPORT-NAME		A32	Report name.
3 RT-DEF-INTERVAL		B2	Graphing interval parameter.
3 RT-DEF-THRESHOLD		B2	Response time threshold at which a detail record is to be created.
3 RT-DEF-MAX-DETAIL		B2	Number of detail records to be retained.
3 RT-DEF-WRAP-OPTION		A4	Detail record wrapping option.
3 RT-DEF-TS-OPTION		A4	Transaction summary record option.
3 RT-DEF-AUTOSTART		A1	Autostart indicator.
3 RT-DEF-HISTORY-INTERVAL		N3.0	History interval (in minutes).
3 RT-DEF-USERID		A8	User ID selection criterion.
3 RT-DEF-PGMNAME		A8	TP transaction program name selection criterion.
3 RT-DEF-NATAPPL		A8	Natural application selection criterion.
3 RT-DEF-NATPGM		A8	Natural program selection criterion.
3 RT-DEF-HISTORY-REFRESH		A1	History refresh indicator.

The following fields refer to response time subsystem interval data historical records (VW and VH (view and view horizontal) commands):

Lvl Field	DE	Format/ Length	Description
3 RT-VW-START-DATE		A8	Start date for interval data historical record (for DATE=OLD in YY/MM/DD format; for DATE=NEW in YYYYMMDD format).
3 RT-VW-START-TIME		A8	Start time for interval data historical record (in HH:MM:SS 24-hour format).
3 RT-VW-THRESHOLD		B4	Interval threshold specified.
2 RT-VW-DATA			Periodic group for interval data historical record.
3 RT-VW-INTERVAL		B4(1:11)	MU containing the intervals for which the interval data historical record was created.
3 RT-VW-TRANS		B4(1:11)	MU containing the number of transactions for each interval.
3 RT-VW-ACALLS		B4(1:11)	MU containing the number of database calls for each interval.

The following fields refer to response time subsystem detailed transaction historical records (VD (view detail) command):

Lvl Field	DE	Format/ Length	Description
2 RT-VD-USERID		A8	TP system user ID.
2 RT-VD-TERMINAL-NAME		A8	TP system terminal name for RT subsystem historical detailed record.
2 RT-VD-NATURAL-UID		A8	Natural user ID (*USER).
2 RT-VD-PROGRAM		A8	TP system transaction program name.
2 RT-VD-TRANS-ENDTIME		A8	The transaction end time (in HH:MM:SS 24-hour format).
2 RT-VD-TRANS-NUMBER		B4	The TP system transaction number.
2 RT-VD-ADABAS-CALLS		B4	The total number of database calls issued.
2 RT-VD-ADABAS-CALLS-TR		B4	The total number of database calls issued for which Natural Monitor has been able to calculate a database elapsed time.
2 RT-VD-TOTAL-ELAPSE-TIME		B4	The total database elapse time (in milliseconds) for all database calls issued.
2 RT-VD-TOTAL-COMMAND-TIME		B4	The total database command time (in units of 16 microseconds) for all all database calls issued.
2 RT-VD-RSP-TIME		B4	The response time (in milliseconds).
2 RT-VD-CPU-TIME		B4	This field is not currently used.
2 RT-VD-HIGH-CMD		A2	The database command issued by the Natural program that had the highest database command time.
2 RT-VD-HIGH-DBID		B2	The database ID accessed by the Natural program that had the highest database command time.
2 RT-VD-HIGH-FNR		B2	The database FNR accessed by the Natural program that had the highest database command time.
2 RT-VD-HIGH-STMT		B3	The Natural statement number that generated the database command within the Natural program that had the highest database command time.
2 RT-VD-HIGH-LEVEL		B1	The Natural call level of the the Natural program that had the highest database command time.
2 RT-VD-THREAD-NUMBER		B1	The Natural thread number that was used by the Natural transaction.
2 RT-VD-HIGH-ADABAS-CALLS		B4	The total number of database calls issued by the Natural program that had the highest database command time
2 RT-VD-HIGH-NATURAL-LOADS		B4	The total number times the Natural program that had the highest database command time was loaded.
2 RT-VD-HIGH-ELAPSE-TIME		B4	The database elapsed time for the Natural program that had the highest database command time.
2 RT-VD-HIGH-COMMAND-TIME		B4	The database command time for the Natural program that had the highest database command time.

The following fields are superdescriptors used to read the Review Natural Monitor repository file:

<b>Lvl Field</b>	<b>DE</b>	<b>Format/ Length</b>	<b>Description</b>
2 NM-KEY	D	A50	Primary search key superdescriptor for reading the Natural Monitor repository file.
2 NM-KEY-2S	D	A50	Secondary twos-complement search key superdescriptor for reading the Natural Monitor repository file.
2 NM-KEY1	D	A48	Internal use search key superdescriptor for reading the Natural Monitor repository file.
2 NM-KEY1-2S	D	A48	Internal use search key superdescriptor for reading the Natural Monitor repository file.
2 NM-KEY2-2S	D	A16	Internal use search key superdescriptor for reading the Natural Monitor repository file.

# Natural Monitor Repository File

V 1	REVIEW-NM-FILE-VIEW			REVIEW-NM-FILE
G 2	CONTROL-FIELDS			/* NM HISTORY CONTROL FIELDS
3	NM-SUBSYSTEM	A	2	/* HISTORY SUBSYSTEM
3	NM-DATE-MAILED	N	8.0	/* DATE MAILED (YYYYMMDD FORMAT)
3	NM-TIME-MAILED	N	6.0	/* TIME MAILED (HHMMSS FORMAT)
3	NM-DATE-COMPLEMENT	N	8.0	/* TWOS COMPLEMENT DATE
3	NM-TIME-COMPLEMENT	N	6.0	/* TWOS COMPLEMENT TIME
3	NM-SORT-FLD	A	32	/* SORT FIELD (REPORT NAME)
3	NM-SEQ	B	2	/* HISTORY RECORD SEQ NUMBER
2	NM-RECORD-TYPE	B	4	/* HISTORY RECORD TYPE
G 2	RESPONSE-TIME-SUBSYSTEM			/* RT SUBSYSTEM FIELDS
3	RT-REPORT-NAME	A	32	/* REPORT NAME
3	RT-DEF-INTERVAL	B	2	/* GRAPH INTERVAL
3	RT-DEF-THRESHOLD	B	2	/* DETAIL RECORD THRESHOLD
3	RT-DEF-MAX-DETAIL	B	2	/* MAXIMUM DETAIL RECORDS
3	RT-DEF-WRAP-OPTION	A	4	/* DETAIL RECORD WRAPPING OPTION
3	RT-DEF-TS-OPTION	A	4	/* TRANSACTION SUMMARY OPTION
3	RT-DEF-AUTOSTART	A	1	/* AUTOSTARTED REPORT INDICATOR
3	RT-DEF-HISTORY-INTERVAL	N	3.0	/* HISTORY REPORT INTERVAL
3	RT-DEF-USERID	A	8	/* SEL.CRIT.FOR USERID
3	RT-DEF-PGMNAME	A	8	/* SEL.CRIT.FOR TRANS PGM NAME
3	RT-DEF-NATAPPL	A	8	/* SEL.CRIT.FOR NATURAL APPL
3	RT-DEF-NATPGM	A	8	/* SEL.CRIT.FOR NATURAL PROG
3	RT-DEF-HISTORY-REFRESH	A	1	/* HISTORY REPORT REFRESH OPTION
3	RT-VW-START-DATE	A	8	/* REPORT START DATE (HISTORY)
3	RT-VW-START-TIME	A	8	/* REPORT START TIME (HISTORY)
3	RT-VW-THRESHOLD	B	4	/* REPORT THRESHOLD (HISTORY)
P 2	RT-VW-DATA			/* HISTORY INTERVAL DATA
3	RT-VW-INTERVAL	B	4	(1:11) /* INT.RANGE (HISTORY)
3	RT-VW-TRANS	B	4	(1:11) /* TRANS/INT.(HISTORY)
3	RT-VW-ACALLS	B	4	(1:11) /* CALLS/INT.(HISTORY)
2	RT-VD-USERID	A	8	DET.REC.TP SYSTEM USERID
2	RT-VD-TERMINAL-NAME	A	8	DET.REC.TERMINAL NAME
2	RT-VD-NATURAL-UID	A	8	DET.REC.NATURAL USERID
2	RT-VD-PROGRAM	A	8	DET.REC.TRANS.PGM.NAME
2	RT-VD-NATURAL-APPL	A	8	DET.REC.NATURAL APPLICATION
2	RT-VD-NATURAL-PROGRAM	A	8	DET.REC.NATURAL PROGRAM
2	RT-VD-TRANS-ENDTIME	A	8	DET.REC.TRANS.END-TIME
2	RT-VD-TRANS-NUMBER	B	4	DET.REC.TRANS.NUMBER
2	RT-VD-ADABAS-CALLS	B	4	DET.REC.TOTAL DATABASE CALLS
2	RT-VD-ADABAS-CALLS-TR	B	4	DET.REC.CALLS(FOR ELPS TIME)
2	RT-VD-TOTAL-ELAPSE-TIME	B	4	DET.REC.TOTAL ELAPSED TIME
2	RT-VD-TOTAL-COMMAND-TIME	B	4	DET.REC.TOTAL COMMAND TIME
2	RT-VD-RSP-TIME	B	4	DET.REC.RESPONSE TIME
2	RT-VD-CPU-TIME	B	4	DET.REC.CPU TIME
2	RT-VD-HIGH-CMD	A	2	DET.REC.HIGH DATABASE COMMAND
2	RT-VD-HIGH-DBID	B	2	DET.REC.HIGH DATABASE ID
2	RT-VD-HIGH-FNR	B	2	DET.REC.HIGH FILE NUMBER
2	RT-VD-HIGH-STMT	B	3	DET.REC.HIGH NATURAL STMT
2	RT-VD-HIGH-LEVEL	B	1	DET.REC.HIGH PGM.CALL LEVEL
2	RT-VD-THREAD-NUMBER	B	1	DET.REC.NATURAL THREAD NR.
2	RT-VD-HIGH-ADABAS-CALLS	B	4	DET.REC.HIGH DATABASE CALLS
2	RT-VD-HIGH-NATURAL-LOADS	B	4	DET.REC.HIGH NAT.PGM.LOADS
2	RT-VD-HIGH-ELAPSE-TIME	B	4	DET.REC.HIGH ELAPSED TIME
2	RT-VD-HIGH-COMMAND-TIME	B	4	DET.REC.HIGH DB CMD TIME
2	NM-KEY	A	50	/* PRIMARY NM SEARCH KEY(SUPERD)

## Natural Monitor Repository File

2 NM-KEY-2S  
2 NM-KEY1  
2 NM-KEY1-2S  
2 NM-KEY2-2S

## Natural Monitor Repository File

A 50 /\* SECONDARY NM SEARCH KEY  
A 48 /\* SECONDARY NM SEARCH KEY  
A 48 /\* SECONDARY NM SEARCH KEY  
A 16 /\* SECONDARY NM SEARCH KEY